



# JET AIR OVEN



**Jet Air Convection Oven, Available in Electric, Gas, or Retherm, Pan Capacity (8) 18" x 26", Integrated Steam Injection (Shot & Pulse) System, Reversing 2-Speed Fan System, Delay Timer, Touch Screen Programmable Controls, Timer, Full View Glass Doors, Interior Lights, Stainless Steel Construction, 3/4 HP, cETLus, NSF**



PROJECT \_\_\_\_\_  
 ITEM NO. \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 MODEL NUMBER: **JA8X , JA8XG , JA8XR**



\*SHOWN ON JA8B

**FEATURES**

- Advanced Touch screen Programmable Controls
  - 32 Programmable Recipes
  - 9 Stage Baking
- Temperature Control up to 500°F (260°C)
  - Fast Preheat (reaches temperature in 15 minutes)
- bake Timer
- Jet Air Reversing Fan System with Variable Air Speeds & Fan Delay
- Door Switch Cutoff for Fan Blower
- Shot & Pulse Steam Capabilities
- Available in Energy Efficient Gas, Electric, or Retherm
- USB Port for Uploading & Downloading Recipes

**CONSTRUCTION**

- Stainless Steel Construction
- Full View Heat Reflective Thermal Glass Doors
- Brightly Lit Interior
- Fully Insulated and Completely Sealed
- Four Swivel Casters (2 locking)
- Dependent Doors for Single Hand Operation

**CLEARANCES**

Minimum Clearance from Combustible Materials:

- 1" (25mm) Sides & Back
- 4" (102mm) on Non-Combustible Floor
- 12" (305mm) Top

**OPTIONS & ACCESSORIES**

- Water Filter (PLF240) [Recommended]
- Gas Quick Disconnect Kit: 4' (1200mm); includes flexible hose, ball and securing device (GAH600)
- Perforated Nickel Plated Pizza Decks (GRPIZ8)
- Equipment Stand on Casters (JA8B)

**WARRANTY**

- One Year Labor & Two Year Part



Model	Crated Weight	Overall Dimensions			Interior Dimensions			Pan Capacity (18"x26")	Shelf Spacing
		W	D	H	W	D	H		
JA8X	840 (381)	37 5/8" (956)	54 1/8" (1375)	41 3/4" (1061)	23 3/4" (603)	31" (787)	33 3/4" (857)	8	4" (102)
JA8XG	840 (381)	37 5/8" (956)	54 1/8" (1375)	41 3/4" (1061)	23 3/4" (603)	31" (787)	33 3/4" (857)	8	4" (102)
JA8XR	840 (381)	37 5/8" (956)	54 1/8" (1375)	41 3/4" (1061)	23 3/4" (603)	31" (787)	33 3/4" (857)	8	4" (102)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION A | 4/20/2021

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858


906.863.4401 | 800.338.9886 | www.doyon.qc.ca





PROJECT \_\_\_\_\_  
 ITEM NO. \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 MODEL NUMBER: **JA8X , JA8XG , JA8XR**

**DRAWINGS**

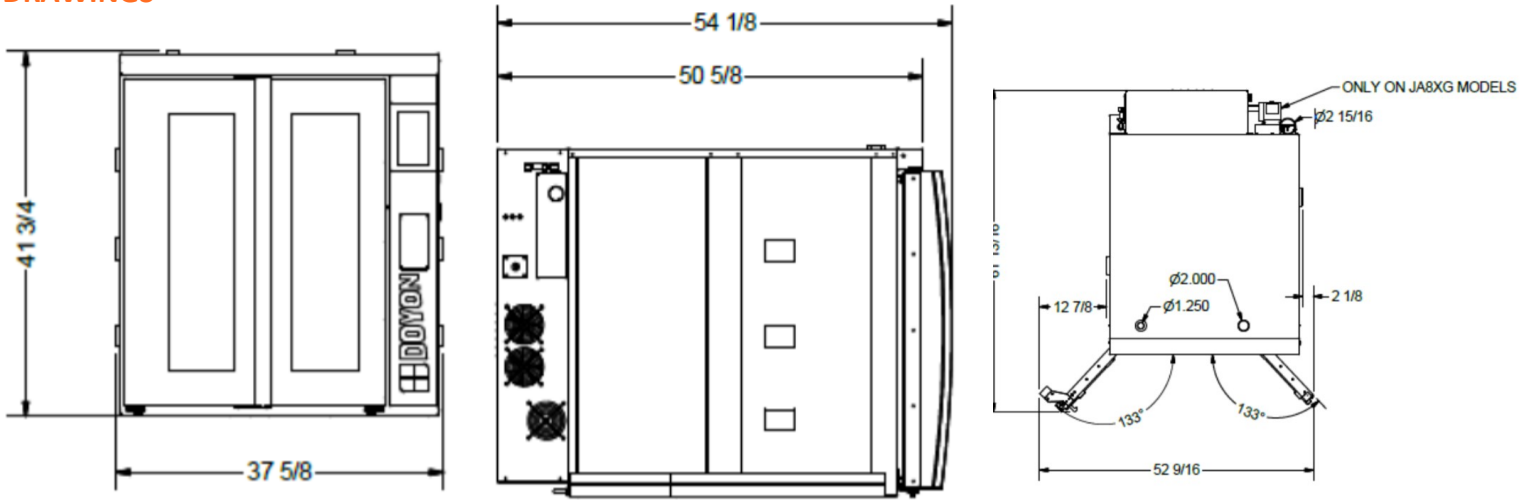

**JA8X & JA8XR ELECTRICAL SYSTEMS DATA**

Model	Electrical System *ground wire not included					
	Volts	Phases	Amps	kW	Wires*	Hz
JA8X	208/240	1	50	10.8	2	50/60
	208/240	3	30	10.8	3	50/60
	480	3	12.5	10.8	3	50/60
JA8XR	208/240	1	80/70	17	2	50/60
	208/240	3	47/43	17	3	50/60
	480	3	20	17	3	50/60

**JA8XG & JA8XGR GAS/ELECTRICAL SYSTEMS**

Model	Gas System			Water Inlet	Electrical System *ground wire not included						
	BTU	D.H.	G.I.		Volts	Phases	Amps	kW	Wires*	Hz	NEMA
JA8XG	65,000	4" (102)	1/2"	1/4"	120	1	8.5	1.4	2	60	5-15P
				(6)	208/240	1	7	1.4	2	60	6-15P
JA8XGR	75,000	4" (102)	1/2"	1/4"	120	1	8.5	1.4	2	60	5-15P
				(6)	120/240	1	7	1.4	2	60	6-15P

**Recommended Gas Pressure | Propane Gas: 11" W.C. Natural Gas: 7" W.C.**

