



## **NORDIC CCU0150 SERIES**

UNDER COUNTER CUBED ICE MAKER




Protected by Agion



## **FEATURES**

- High-yield** – Produces up to 174 lbs. (79 Kgs.) of ice/day
- Storage** – 100 lbs. (45 Kgs.) built-in application storage
- Antimicrobial** – Built-in Agion Antimicrobial product protection effective against mold, mildew, and fungus
- Small footprint** – Ultra low-profile - only 39" (991 mm) tall and 34" (605 mm) wide
- Durable** – Rotomolded exterior cladding
- Easy access** – Large bin door opening
- Customizable** – Adjustable leg height

**Dimensions and Air Flow**

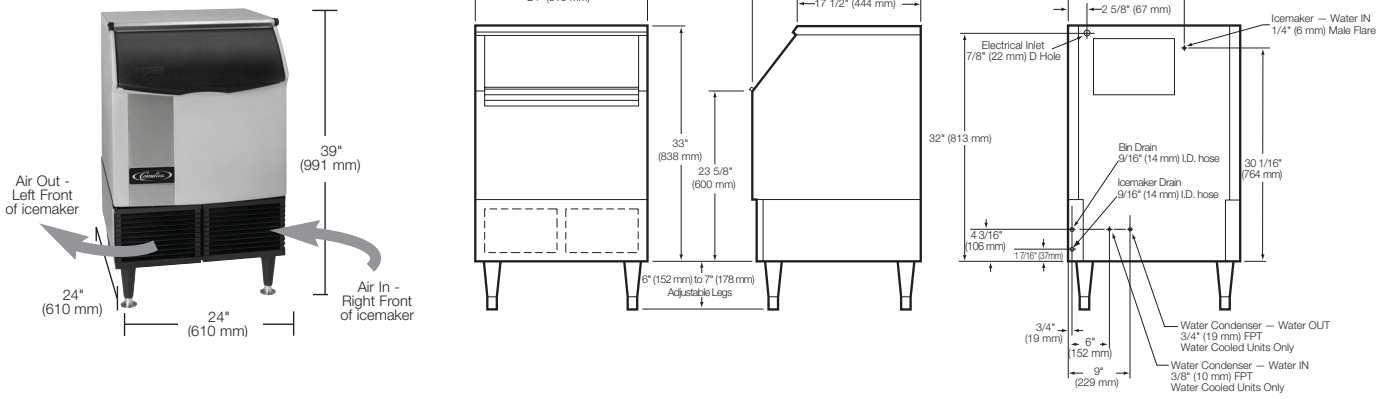


MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.
				Ice Prod. Use	Cond. Use				
<b>CCU0150A*11</b>	Air	174 (79)	112 (51)	34	n/a	11.8	3572	115/60/1	9.7

\* Represents cube size. For full cube substitute an "F", for half cube substitute an "H".  
 Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.  
 Note #1: Application bin storage is 100 lbs. (45 Kgs.) = 90% of Internal Volume x 34 lbs. per cubic foot  
 Note #2: ARI bin storage is 74 lbs. (34 Kgs.) = 80% of Internal Volume x 30 lbs. per cubic foot

1. 90°/70° figures are rated in accordance with ARI Standard 810.

**OPERATING LIMITS**

Ambient Temp. Range Air & Water	50° - 100°F (10° - 38°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)



Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)

**TECHNICAL SPECIFICATIONS**

NUMBER OF WIRES..... 3  
 MAX. FUSE SIZE..... 15  
 SHIPPING WEIGHT LBS (KGS.) .. 160 (73)

AGENCY LISTINGS.....



© 2016 CORNELIUS

CG5053-0516

IN THE U.S.A.  
 Ph: 800.238.3600  
 Fax: 800.258.0255

OUTSIDE THE U.S.A.  
 Ph: 763.488.8200  
 Email: webmaster@cornelius.com

101 Broadway Street West  
 Osseo, MN 55369  
 www.cornelius.com

For more information or to place an order, contact your sales representative or authorized distributor.