

MODEL: IMD-EVV23R1G
Wine cellars Serie Vintage.


General Strengths

- ✓ *Wine cooler, retro models, manufactured for exhibiting, maintaining and preserving wine with a similar design like refrigeration equipment manufactured in the 1960's and built with the current production technologies.*
- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning, the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust of temperature ranges to meet end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested in helium chambers in order to detect refrigeration leaks.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.

Revision: 02 Date: 07/13/2018 IMD-EVV23R1G_FT_62_2

MODEL	Dimensions (inches) (mm)			Nº Doors	Nº Shelves	Nº Bottles	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (ºF) (ºC)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H										
IMD-EVV23R1G	27-1/8 690	23-5/8 601	80 2032	1	5	90	R134a	0.51 230	39ºF / 64ºF +4ºC / +18ºC	9.35 265	1/3	4.5	310 140

FTL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: IMD-EVV23R1G

Wine cellars Serie Vintage.

STANDARD FEATURES

➤ **Exterior**

- 100% Pine wood exterior (Top, Front, Sides).

➤ **Interior**

- AISI 430 18/10 Stainless Steel,
- Sealed interior floors and rounded cabinet corners,
- LED Interior lighting.

➤ **Doors**

- Wooden doors with double glass (6-10-4),
- Easy removal triple chamber gaskets,
- Full-height door opening: 19-1/4"x53" (489x1346mm).

➤ **Insulation**

- Free CFC's high density (40kg/m3) polyurethane with low GWP & Zero ODP Effect.

➤ **Shelving**

- (5) wooden shelves, adjustable height and easy removal,
- Dimensions WxD: 18-3/4"x16-1/2" (477x420 mm).

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Energy -saving non- electric condensate pan,
- Evaporator coil coated with anti-corrosion material 100% Polyester,
- Forced air refrigeration system,
- Control of the final defrost temperature,
- Refrigeration capacity: 1017 Btu/h (14°F) / 298 W (-10°C).

➤ **Electrical**

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V / 1ph / 60 Hz.
- 15 AMP breakers required,




OPTIONAL FEATURES

- ✓ Decoration: Cherry (standard), black and white (optional),
- ✓ Shelves,
- ✓ Electrical connection is 230 V / 1ph / 50 Hz (plug type varies).

- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW

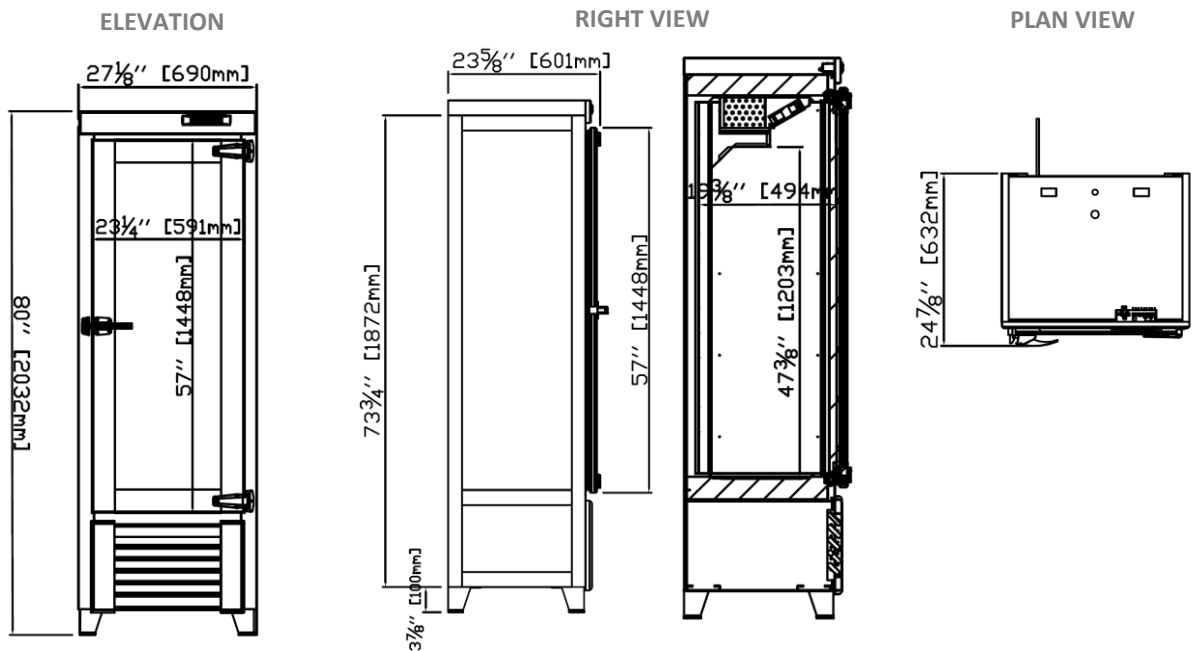

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 1409 N.W. 84th Avenue
 Doral, FL 33126
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
sales@infrico.com

APPROVALS: _____ AVAILABLE AT: _____