

Project:	
Location:	
Item #:	Quantity:
Model #:	

MODEL: IDC-VBR9R

DISPLAY CASES - Deli / Pastry - Curved Glass





General Strengths

- Sanitation. The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- **Doors.** Self-closing door system with permanent pressure. All doors include triple chamber door gaskets, easy to remove and snap in.
- Control systems. Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- Modular Line. Designed for pastry, Viennese breads and bakery.
- 100% Tested. All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- Certified. Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- Lighting. Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Increases product visibility considerably.

MODEL	Dimensions (inches) (mm)			Nº	Ref.	Ref. Weight	Temp. Range	Capacity (Cu. Ft.)	Cond. Unit.	Case Amps	Crated Weight
	W	D	Н	Doors		(Lbs.) (gr.)	(°F) (°C)	(L)	H.P.	115 V.	(Lbs.) (Kg.)
IDC-VBR9R	38-1/2	31-7/8	51-1/8	2	R404A	0.88	33ºF/41ºF	10	1/2	7.8	489
	978	810	1300			400	0°C/+5°C	280			220

Infrico USA Corp.

7042 N.W. 46th Street

Miami, FL 33166

1.305.777.9599 Office 1.305.777.9598 Fax

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE













www.infrico.us service@infrico.com sales@infrico.com

APPROVALS: AVAILABLE AT:



Project:	·	
Location:		
Item #:	Quantity:	
Model #:		

MODEL: IDC-VBR9R

DISPLAY CASES - Deli / Pastry - Curved Glass

STANDARD FEATURES

Exterior

- AISI 304 Stainless Steel, including stainless top,
- Heavy duty ball transfer and levelling feet,
- Glass sided panels with thermopane double glass,
- Tilt forward glass opening system,
- Standard decoration: White RAL 9016.

Interior

- AISI 304 Stainless Steel.
- LED lighting in canopy and under each glass shelf.
- Glass shelves built into silver anodized Aluminium frames, easy removable for cleaning.

OPTIONAL FEATURES

- Customizable decoration for lower front and side panels,
- ✓ Optional decoration: Black RAL 9017, Red RAL3001, Blue RAL 5015, Sky blue RAL DESIGN 2108025, Pistachio RAL DESIGN 1107060, Orange RAL 2003,
- Dry case system,
- Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
- Low GWP & Zero ODP effect.

Doors

- Rear sliding doors,
- Built-in thermopane double glass.

Refrigeration

- Digital temperature controller with automatic defrost system,
- Temperature display on front,
- Double Stainless Steel evaporative pan system, first, by hot gas, second, by electrical resistance,
- Forced air refrigeration system,
- Case engineered to operate at 75°F (25°C), and 55% relative humidity,
- Refrigeration capacity: 3740 Btu/h(14°F)/ 1096 W(-10°C).

Electrical


Cord and NEMA 5-20P plug,



Electrical connection is 115V / 1ph / 60 Hz

ETL Listed to UL471 Standard and Sanitation classified to NSF7.

PLAN VIEW

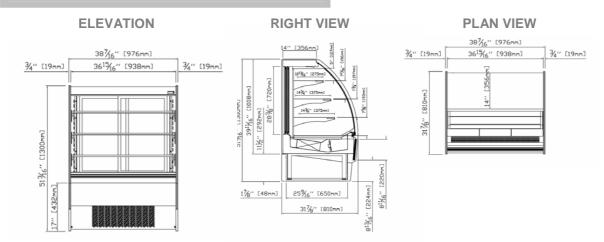

1.305.777.9599 Office 1.305.777.9598 Fax

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE











Infrico USA Corp. www.infrico.us 7042 N.W. 46th Street Miami, FL 33166

service@infrico.com sales@infrico.com

APPROVALS: AVAILABLE AT:



