

## **REACH IN REFRIGERATOR**

D55R-GS2

Bottom Mounted / 2 Glass Door



## TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2+ Nema Config. NEMA5-15P



## PRODUCT FEATURES

- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- [8.8] Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- ( Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

(a) info@dukersusa.com www.DukersUSA.com


## **DETAILS & SPECIFICATIONS**

D55R-GS2

Front View

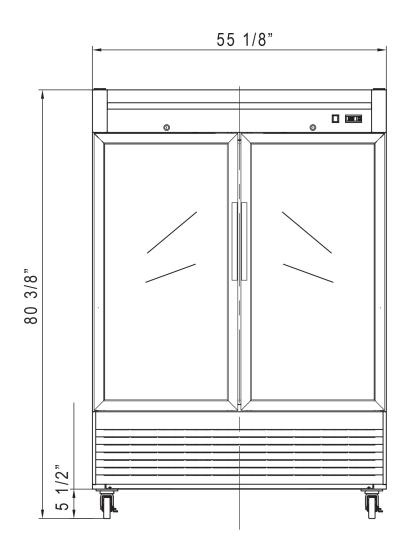

Side View

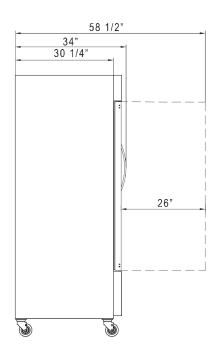

MODEL BOOK GOZ				
Rated Voltage	115V			
Rated Frequency	60Hz			
Total Input Power	730W			
Total Current	8.6A			
Total Capacity	41.73 cu ft			
Climatic Category	4-5			
Protection Type	1			
Design Pressure High Side	300 PSIG			
Design Pressure Low Side	150 PSIG			
Insulation Blowing Gas	C-Pentane			
Refrigerant	R290/4 58 oz			

MODEL D55R-GS2

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D55R-GS2	55 1/8 x 34 x 80 3/8	57 1/8 x 35 x 82 3/8	595 lbs	8	21















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com www.DukersUSA.com