

DESIGNER LINE ROLL-IN WARMER

Model: DL1WI

Designer Line

1-Section Roll-In Warmer with 66¼” Cart Capacity

DL1WI - Stainless steel front, aluminum end panels and interior
DL1WI-SA - Stainless steel exterior, aluminum interior
DL1WI-SS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Correctional Facility Options
Chrome or stainless steel shelves	• One way security screws
Rehinging of door (consult factory)	• Locking hasp (lock not included)
Custom laminates	• Stainless steel mesh cover
Half doors	• Coverless hinges
Special electrical req. (consult factory)	

Consult factory for other model configurations, options and accessories.

Continental[®]
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

Self contained, performance rated “plug” heating system
 90°F to 180°F temperature range
 Unique air flow distribution ducts

CABINET ARCHITECTURE

3” non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handle
 Cam action, lift off hinges
 Magnetic snap in Santoprene™ door gasket
 Cylinder lock in door
 Self-closing door
 66 ½” high door opening (66 ¼”H rack capacity*)

MODEL FEATURES

Electronic controller with digital display & hi-low alarm
 Cabinet upper side panels and refrigeration “plug” system
 can be removed and reinstalled at job site
 Removable stainless steel rack guides
 Removable stainless steel ramp
 Reinforced stainless steel floor

* Racks not supplied

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	32 (906 cu l)
Width, Overall (inches)	35 1/4 (895 mm)
Depth, Overall (inches) (including handle)	35 3/8 (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	65 (1651 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Door Height (inches)	66 1/2 (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Doors	1
Rack Capacity**	1

ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	7.3 (7.3)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (International)	No (No)

SHIPPING DATA

Height - Crated (inches)	90 (2286 mm)
Width - Crated (inches)	43 (1092 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	94 (2661 cu l)
Weight Std - Crated (pounds)	360 (163 kg)
Weight SS - Crated (pounds)	420 (191 kg)

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

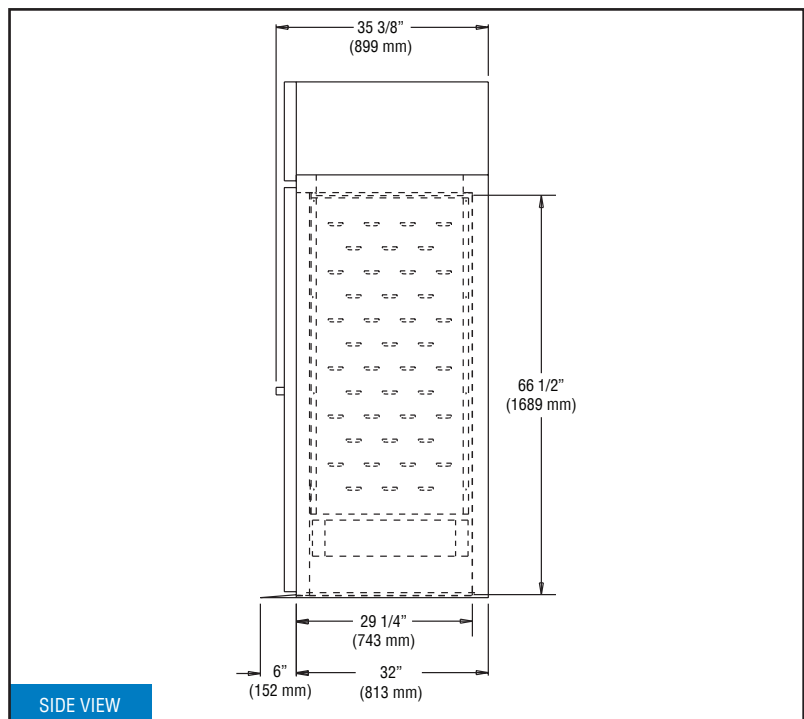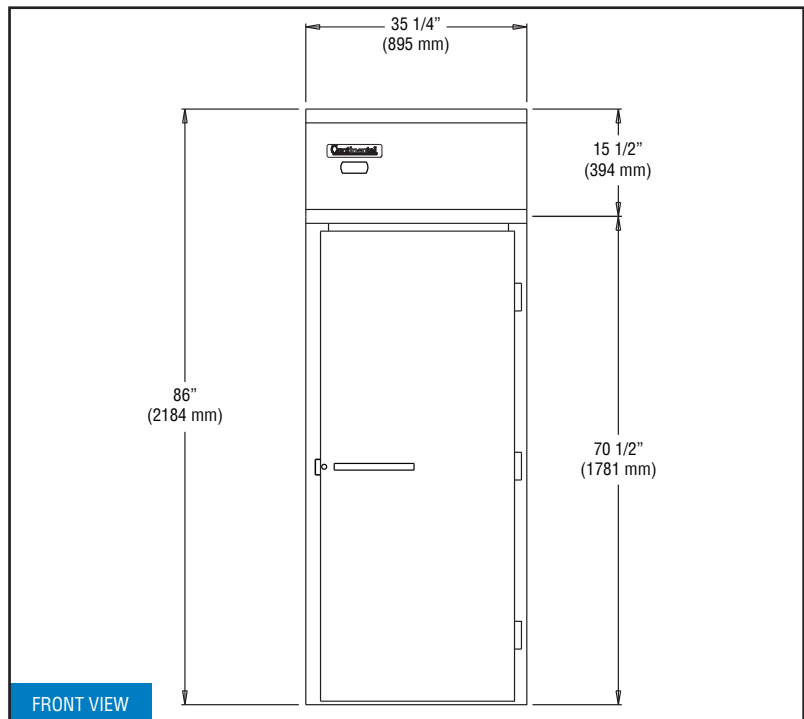

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 7/19/24