



# BakerSeries Triple Wide Pass-Through Proofer

Item No.	
Project	
Quantity	

### MODEL: LRP3 PC - Series



# Model LRP3-40 Shown

### **MODEL / RACK CAPACITY**

Model / Depth	Side Load	End Load	Double
LRP3-30P	3 Racks	4 Racks	None
LRP3-40P	6 Racks	4 Racks	3 racks
LRP3-50P	6 Racks	4 Racks	3 Racks
LRP3-60P	9 Racks	8 Racks	3 Racks
LRP3-70P	9 Racks	8 Racks	6 Racks
LRP3-80P	12 Racks	8 Racks	6 Racks
LRP3-90P	12 Racks	12 Racks	6 Racks
LRP3-100P	15 Racks	12 Racks	6 Racks
LRP3-110P	15 Racks	16 Racks	6 Racks
LRP3-120P	18 Racks	16 Racks	9 Racks

### **Short Bid Specification:**

Proofer shall be an *LBC Bakery Equipment Model*[insert 30P, 40P, 50P, 60P, 70P, 80P, 90P,100P, 110P, 120P] 5 to
13.2kW electrically heated, 4-door, triple-wide Pass-Through roll-in rack
unit with: quick responding air-wash heat / humidity system; modular
foam insulated cam lock panel construction; all 300 series stainless
steel interior, with protective cart bumpers; heavy-duty door with
magnetic seal/mechanical closure system and full width protective bar
handle; simple computerized controls, door mounted at eye-level, with
accurate digital temperature, humidity and time readouts; plus all the
features listed and options checked.

#### STANDARD PRODUCT WARRANTY

One-Year Parts and Labor (contiguous US Including Alaska and Hawaii, Canada)

#### **Construction Features**

- Four Door, triple wide, Pass through
- Heavy duty stainless steel exterior with 300 Series stainless steel interior and aluminized steel top
- . Walls Ceilings and doors are foam insulated
- . Modular wall and ceiling panels with cam lock construction
- . Rapid responding air-wash heat and humidity system
- 208/240 VAC single or 3-phase power, field convertible

#### **Performance Features**

- . 70 120 Degree F proofing range
- 50 99% humidity range
- Non-submerged calrod type heaters
- Interior bumpers protect interior walls from damage
- Lighted interior

## **Controls Features**

- . All digital controls mounted in the door at eye-level
- . PID Type controls for rapid accurate response without overshoot
- Digital set Temperature, Humidity, Time
- . Installed in the left hand door at eye-level
- . Large LED displays





Sheet Number LRP3PC v 03 (rev 10/10)



## BakerSeries Triple Wide Pass Through Roll-In Proofer MODEL: LRP3 PC -Series


#### **INSTALLATION REQUIREMENT**

Ships KD requires on-site installation Either 208 or 240 VAC 1 or 3-phase External Support may be required

**OPTIONS & ACCESSORIES** 

Stainless Steel Floor

1/2" NPT Cold water connection 1/2" PVC vented drain connection

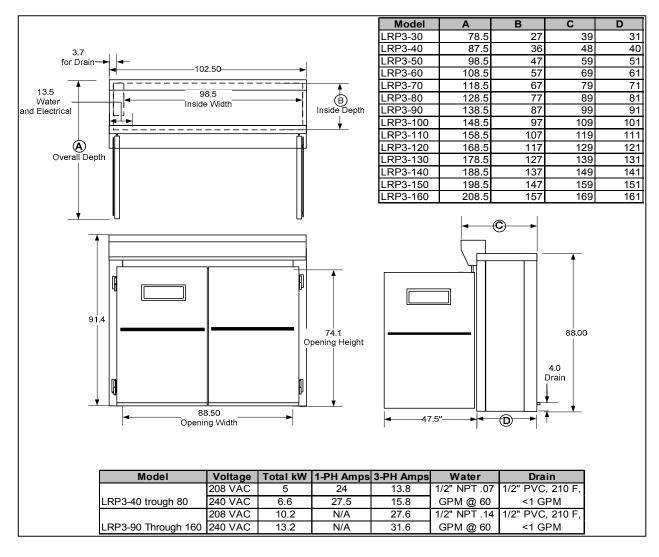

**IMPORTANT: Your local water conditions may damage your LBC appliance.** Failure to properly treat water may result in damage and may void your warranty. Ensure that your water supply meets these minimum water quality specification.

Parameter	Unit	Value
Alkalinity	ppm	22
Aluminum	ppb	17
Calcium	ppm	3.3
Free Chlorine Residual	mag	0.6

Parameter	Unit	Value
Magnesium	ppm	0.65
рН	s.u.	8.5
Sodium	ppm	8.5
Total Hardness	ppm	11.9