

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

# **WORKTOP REFRIGERATOR**

MODEL: WTRD48AHC-2-FIP

WTRD48AHC Solid Door Refrigerator With Drawers & Foamed-In Place Backsplash Hydrocarbon Series





### **CABINET CONSTRUCTION**

- Stainless steel front, sides, drawers, door and grille (galvanized back
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- Foamed-in place backsplash
- Full electronic control
- Interior thermometer is standard
- Snap-in drawer gaskets
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket attached to each door for positive seal
- Field-reversible door (hinge kit not included)
- Two (2) epoxy-coated steel wire shelves
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

## **OPTIONS & ACCESSORIES**

- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Right or left hinged door
- Lock (solid doors only)
- Bun rack
- Wire shelf divider
- · Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- · Low profile casters
- Roller kit
- Remote option\* (see note on back on page)

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	WTRD48AHC-2-FIP	
EXTERNAL DIMENSIONAL DATA		
Width Overall	48"	
Depth Overall with Handle & Bumper	32"	
Height Overall with 6" Casters	39 %"	
Number of Drawers	2	
Drawer Openings	(2) 19 % x 9 %	
Number of Door	1	
Depth with Door Open 90°	52 <sup>1</sup> ⁄ <sub>4</sub> "	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	11.82	
Internal Width Overall (in)	44"	
Internal Depth Overall (in)	15 ¾"	
Internal Height Overall (in)	23"	
No. Of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	2.2	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1094	
Heat Rejection (BTU/Hr)	1641	
Charge (lbs/grams/ounces)	0.2425 / 110 / 3.9	
SHIPPING DATA		
Gross Weight - Crated	282 lbs	
Height - Crated	35"	
Width - Crated	50"	
Depth - Crated	34"	

\*\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).





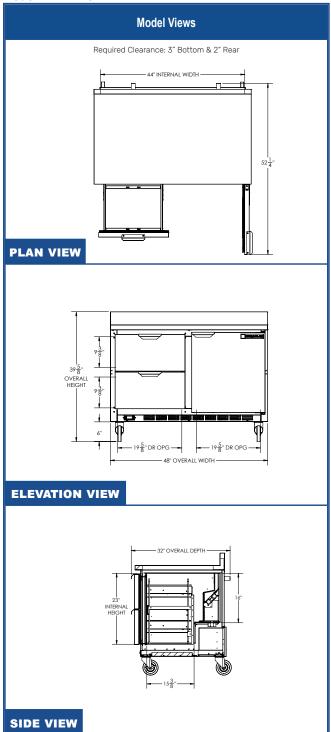

#### **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8 and plug set.



