

FOUR HOB



PERFORMANCE

The CookTek® Four Hob features four independent induction cook zones for precise, efficient heating of any induction-compatible pan. Its built-in redundancy ensures uninterrupted performance, allowing each zone to operate independently. Designed for back-of-the-house applications, it includes a high-impact glass-ceramic cooktop, an automatic shut-off feature, integral cooling fans, and a self-diagnosing microprocessor for a safer and more reliable kitchen environment.


FEATURES

- Four independently controlled induction cook zones
- 14,000 watts (3,500/hob)
- Built-in redundancy to ensure uninterrupted performance even if one hob requires maintenance
- Over 90% energy efficient—outperforms gas and electric burners
- Seamlessly drops into a stainless-steel cart base with built-in storage
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic cooktop with four separate induction cook zones
- Automatic pan detection allows for instant energy transmission to pan
- LED bar graph displays
- Rotary knobs with 0-10 power settings
- · Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffles ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- · Integral fans to keep internal components cool
- One-year warranty on parts and labor

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

^{*}Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.



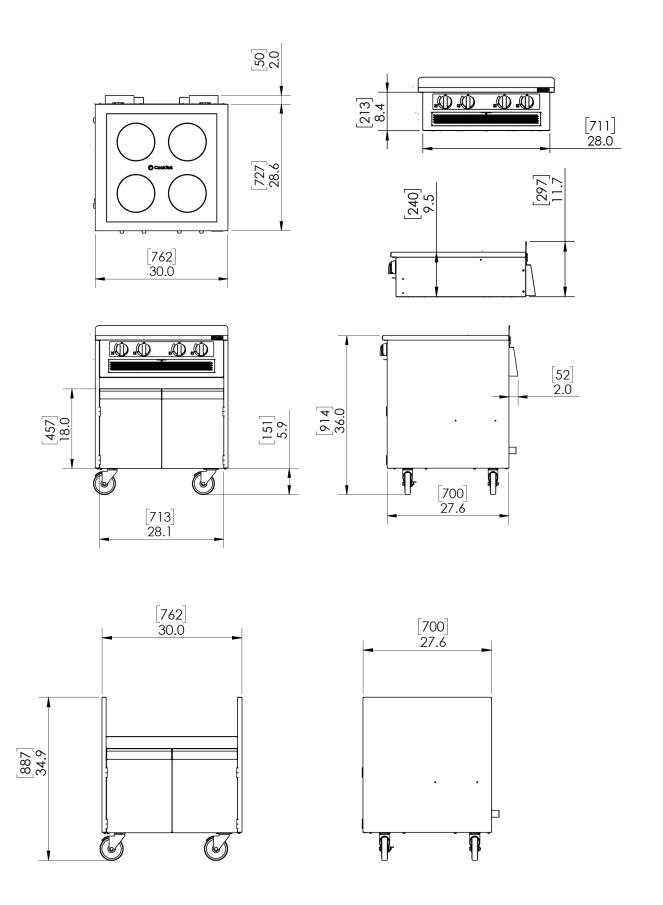



DIMENSIONS			
Full Unit Height	11.7″	297 mm	
Full Unit Width	30"	762 mm	
Full Unit Depth	28.6"	727 mm	
Cooking Surface Width	24.9"	632 mm	
Cooking Surface Depth	24.4"	620 mm	
Weight	115 lb.	52.1 kg	
Max Ambient Temperature	122°F	50°C	
WALL CLEARANCE			
Front	2"	50 mm	
Sides	2"	50 mm	
Rear	2"	50 mm	
CART DIMENSIONS			
Cart Height	34.9"	887 mm	
Cart Width	30.0"	95 mm	
Cart Depth	27.6"	700 mm	
Cart Weight	89 lb.	40.3 kg	

SHIPPING INFORMATION		
Packaged Height	18"	457 mm
Packaged Width	42"	1067 mm
Packaged Depth	38"	965 mm
Packaged Weight	205 lb.	93 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS (SINGLE PHASE)		
UNITED STATES/CANADA		
VIC-9400-1	200-240V, 3500W/hob, 3 Phase, 44.5A, Hardwired	
INTERNATIONAL		
VIC-9400-2	200-240V, 3500W/hob, 3 Phase, 44.5A, Hardwired	