



Stainless steel cabinet construction

Stainless steel top with black vinyl coated steel walled exterior. Interior is galvanized steel with stainless steel floor..



Temperature range between 33°F ~ 39°F

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290)

Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.





Exterior Dimensions (inches/mm)

L D H
23 3/8" 31 1/8" 39 1/8"
595mm 792mm 995mm

Weight (lbs/kg)

Net Weight 132 lbs 60 kg Ship Weight 139 lbs 63 kg







Cabinet construction

- High density foamed in place polyurethane insulation Environmentally safe.
- Two (2) adjustable shelves per section
- Interior height allows stacking of three "tall boy" beers

Refrigeration

- Front breathing, side mounted compressor unit. Compressor configuration allows unit to be efficient in narrow spaces and be serviced without being moved.
- Epoxy coated evaporator reduces potential corrosion
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Automatic defrosting


Doors


- Black recessed door handles
- Durable gasket with easy replacement.
- Standard door locks

Optional Features & Accessories


- 6" legs available
- 4" caster available

Front view Side view

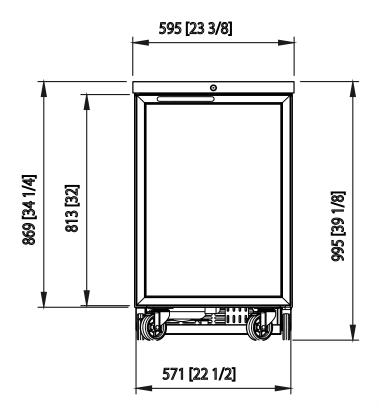

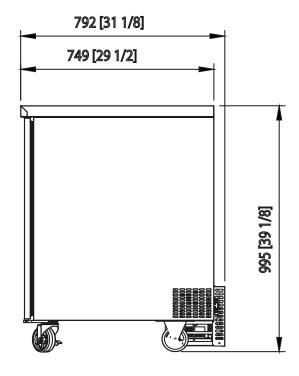

Top view

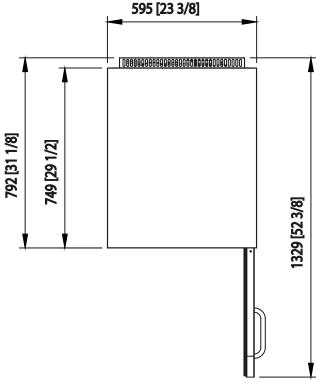

This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.
 Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par TEsat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.

Door Capacity (Cu.Ft.) 12 oz beer Bottles 189 12 oz beer Cans 259 **Shelves** 2 Refrigerant R-290 **Temperature** 33°F ~ 39°F Range Easy Sliding Maintenance Condensing Unit 9.8 ft long (3m) flexible three Connection wire cord with modeled plug HP 1/4 Voltage 115V/60Hz **Amps** 2.5 **NEMA** Config. NEMA 5-15 Lighting Interior LED lighting



BLUENIX Blue Air has right to change specifications without further notice.







Blueain by