

WE RAISE THE BAR. WE SET THE STANDARD.

Project Item Number Quantity

GHIVEN DE LA CONTROL DE LA CON

Bowl Cutter with 18" Bowl and #12 PTO Hub

Model:

> BC18: 18" (45.7cm) BOWL CUTTER





Features:

- Perfect for pulled pork, parsley, root vegetables, meat, cheese, breads, spreads, dips and salads
- 1hp motor

Bowl Cutter

Univex Corporation

- 18" (45.7cm) stainless steel bowl rotates at 22 rpm
- Cutlery grade stainless steel twin blades make 3768 cuts per minute
- Polished and anodized aluminum body
- Simple operation with illuminated momentary start/stop push button
- Bowl cover interlock prevents unit from running when cover is not locked and closed
- Bowl sensing switch prevents operation without bowl present
- Built in #12 PTO (power take-off) hub for use with optional PTO attachments

Standard Accessories:

- 18" (45.7cm) 304 stainless steel bowl
- Twin cutlery grade knives
- #12 PTO hub

Warranty:

• One year, on-site parts and labor

Optional Accessories:

- Plastic cover
- VS9 vegetable slicer
- VS9H shredder
- ALMFC12 meat and food grinder



Univex Corporation www.Univexcorp.com


3 Old Rockingham Rd Salem, NH 03079 United States of America TEL: (800)258-6358 INTL TEL: (603)893-6191 FAX: (800)356-5614 INTL FAX: (603)893-1249

Printed in U.S.A. REV 1 06/2017 LH-925



WE RAISE THE BAR. WE SET THE STANDARD.

Bowl Cutter BC18

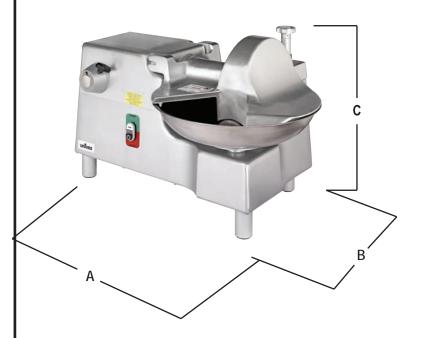

Width 34.5" (876mm)

Depth 23.5" (597mm)

Height
21" (533mm)
Height Aith cover open
37.5" (353mm)

Drive: Knife shaft, ball bearing mounted, driven at 1750 rpm by eight ribbed poly "V" belt

Bowl: 18" (45.7cm) diameter, polished, die drawn, 304 stainless steel, driven at 22 rpm

Switch: Momentary contact stop and start push button. Two pole contactor provides no voltage release protection. Pilot light and protective boot

Knife Blades: Cutlery grade stainless steel, 3768 cuts per minute

PTO Hub: Industry standard #12 PTO hub running at 269 rpm

Housing and Bowl Cover: Cast aluminum, polished and anodized

Motor: Capacitor start

NEMA #: 5-15-P

 Electrical Information (60Hz)

 Voltage
 Phase
 hp(kW)
 Amps

 Standard Voltage
 115
 1
 1.00 (0.75)
 9.0

 Optional Voltage
 208-230
 1
 1.00 (0.75)
 4.98-4.50

Max Volume 8 Liters

Shipping Information		
Net Weight	Shipping Weight	Overall Dimensions
151 lbs. (68.5Kg)	186 lbs. (84.4Kg)	28" (71.1cm) H x 39" (99.1cm) W x 32" (81.3cm) D



Univex Corporation www.Univexcorp.com

3 Old Rockingham Rd Salem, NH 03079 United States of America TEL: (800)258-6358 INTL TEL: (603)893-6191 FAX: (800)356-5614 INTL FAX: (603)893-1249