
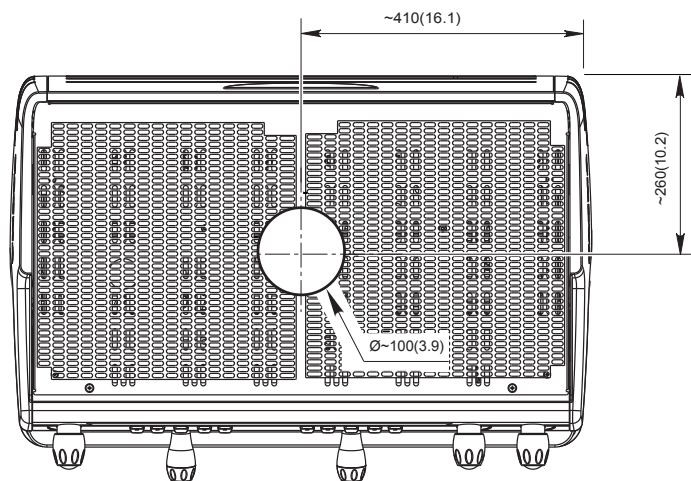


# E98UP

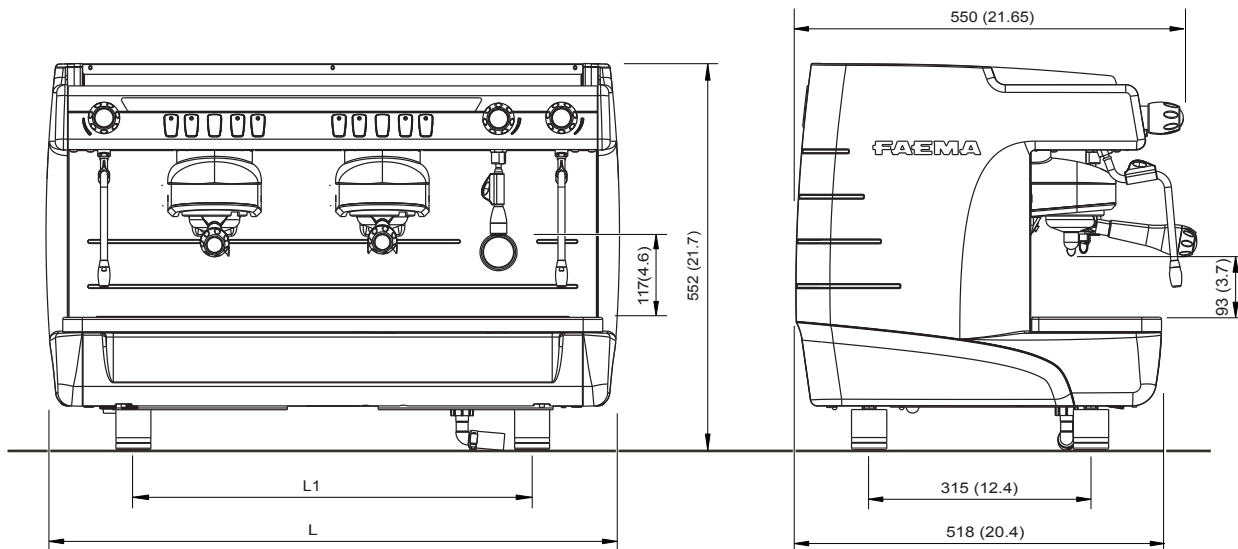

DIMENSIONS			
		2 gr.	3 gr.
L	mm	820	1020
	inches	32.3	40.1
L1	mm	570	770
	inches	22.4	30.2
Weight	Kg	63	78
	pounds	139	172

MACHINE	POWER SUPPLY	INSTALLED POWER	LINE POWER	SUPPLY CABLE SECTION
2 GR.	380-415 V3N 50/60 Hz	4.1-4.8 kW	8 A	5x1,5 mm <sup>2</sup> or 5x2,5 mm <sup>2</sup>
	220-240 V3 50/60 Hz		13 A	4x2,5 mm <sup>2</sup>
	220-240 V 50/60 Hz	4.1-4.8 kW	20 A	3x4 mm <sup>2</sup> or 3x6 mm <sup>2</sup>
	power reduced 16A 220-240 V 50/60 Hz	3.0-3.6 kW	16 A	
	power reduced 13A 220-240 V 50/60 Hz	2.5-3.0 kW	13 A	
3 GR.	380-415 V3N 50/60 Hz	5.9-7.0 kW	11 A	5x1,5 mm <sup>2</sup> or 5x2,5 mm <sup>2</sup>
	220-240 V3 50/60 Hz		17 A	4x2,5 mm <sup>2</sup>
	220-240 V 50/60 Hz		29 A	3x6 mm <sup>2</sup>

## INTERRUTTORE

- Omnipolare con distanza di apertura contatti 3 mm
- Protezione da corrente di dispersione con valore pari a 30 mA

## SWITCH

- Omnipolar, 3 mm opening contact distance
- Protection from leakage current with a value equal to 30 mA

## MESSA A TERRA

- Obbligatoria

## GROUNDING

- Required

## ALLACCIAMENTO IDRAULICO

- $\varnothing$  3/8 gas

## HYDRAULIC CONNECTION

- $\varnothing$  3/8 gas

## PRESSIONE DI ALIMENTAZIONE IDRAULICA

- 0 ÷ 6 bar (0.6 MPa)

## HYDRAULIC FEEDING PRESSURE

- 0 ÷ 6 bar (0.6 MPa)

## SCARICO IDRAULICO

- $\varnothing$  min. 50 mm

## WATER DISCHARGE

- $\varnothing$  min. 50 mm