

Dis-assembling | CLEANING | Re-assembling

For more detailed information on operation and cleaning, go to www.citrusamerica.com/training



1 Turn Off and Unplug your juicer before cleaning.



2 Ensure that **no fruit** remain in the **Fruit Supply Tunnel** or between the **Pressing Elements**.



3 Remove the cover of the **SB-Tap**.



4 Pull the **SB-Tap** out of the machine.



5 Turn the **SB-Tap Lever** clockwise and pull straight out.



6 Remove the **Peel Bucket**.



7 Pull out the **Fruit Sieve Support** then remove the **Fine and Coarse Sieve**.




8 Loosen **Front Cover Screws** then remove the **Front Cover**.
CAUTION! HANDWASH ONLY!



9 Remove the **Fruit Supply Tunnel** by opening the fixation lever.




10 Remove the **Cross Holder** by loosening and pulling the screw.

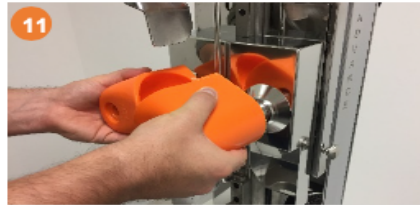

11 Remove the **Upper Pressing Elements**.



12 Remove the **Knife** by opening the **Fixation Flap** at the top.
CAUTION! RISK OF INJURY!

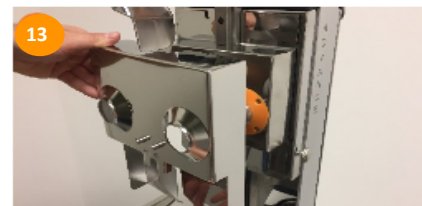

13 Remove the **Double Cover**.



14 Remove the **Drip Tray**.

1. BEFORE CLEANING **SWITCH OFF AND UNPLUG JUICER.**

2. CLEAN JUICER AT LEAST 1X DAY!

3. ENSURE THAT ALL PARTS ARE MOUNTED PROPERLY AFTER REASSEMBLY

4. IF YOUR JUICER DOES NOT START AFTER INPUT FROM ON/OFF SWITCH, REFER TO THE CONTROL PANEL.

5. KEEP THESE INSTRUCTIONS NEAR JUICER!



① Front Cover Screws

② Front Cover

③ Peel Bucket

④ Fruit Sieve Support

⑤ Fruit Supply Tunnel

⑥ Cross Holder

⑦ Upper Pressing Elements

⑧ Knife

⑨ Double Cover

⑩ SB-Tap

⑪ Main Power Switch



ALL PARTS EXCEPT FOR THE ACRYLIC FRONT COVER ARE DISHWASHER SAFE.



USE A NON-ABRASIVE DETERGENT AND A SOFT TOWEL FOR CLEANING.

DO NOT SPRAY OR HOSE DOWN THE MACHINE. ONLY WIPE DOWN.

TECH SUPPORT:

1-855-MY-CITRO

(1-855-692-4876)