

REACH IN REFRIGERATOR

D₂₈AR

Top Mounted / Solid Door





1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F 33 ~ 41°F
Compressor Power (HP) 1/5
Nema Config. NEMA5-15P

PRODUCT FEATURES

- Equipped with Locking Doors
- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- 国 Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey **(1-800-931-8628**


DETAILS & SPECIFICATIONS

D28AR

Front View

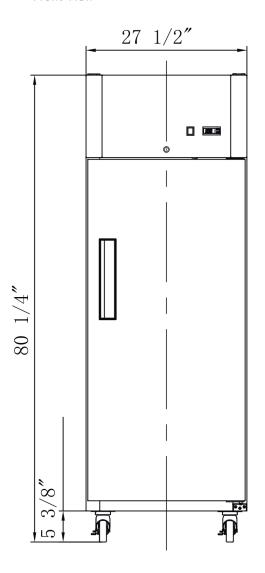

Side View



MUDEL DZ8AR			
Rated Voltage	115V		
Rated Frequency	60Hz		
Total Input Power	260W		
Total Current	3.1A		
Total Capacity	18.31 cu ft		
Climatic Category Protection Type	4-5 I		
Design Pressure High Side	300 PSIG		
Design Pressure Low Side	150 PSIG		
Insulation Blowing Gas	C-Pentane		
Refrigerant	R290/3.17 oz		

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D28AR	27 1/2 x 34 1/2 x 80 1/4	29 1/8 x 35 1/2 x 82 1/4	286 lbs	4	39















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

