

<b>MODEL: IDC-VC09</b>	<b>PASTRY DISPLAY CASES – Combo Series</b>
------------------------	--

**General Strengths**

- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user's requirements.
- ✓ **100% Tested.** All condenser units are 100% tested in helium chambers in order to detect refrigeration leaks.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.



Revision: 01 Date: 03/04/2019 IDC-VC09\_FT\_62.1

MODEL	Dimensions (inches) (mm)			Sides	Shelving	Ref.	Refrig. Amount (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IDC-VC09	37 <i>938</i>	35 <i>810</i>	57-1/4 <i>1455</i>	1-3/16+1-3/16 <i>30+30</i>	1	R404A	0.77 <i>350</i>	39°F / 45°F <i>+4°C/+7°C</i>	7.09 <i>201</i>	5/8	7.8	510 <i>231</i>

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico USA Corp.**  
 1409 N.W. 84th Avenue  
 Doral, FL 33126  
 1.305.777.9599 Office  
 1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
 service@infrico.com

APPROVALS: \_\_\_\_\_ AVAILABLE AT: \_\_\_\_\_

**MODEL: IDC-VC09**

**PASTRY DISPLAY CASES – Combo Series**

**STANDARD FEATURES**

➤ **Exterior**

- Laminated steel plate,
- Exhibition area in EPOXI,
- Decoration DM lacqued,
- Hinged front tempered glass,
- Rear sliding doors,
- Double lateral glass sides,
- Dry countertop,
- Night curtain,

➤ **Interior**

- Enamelled steel base,
- LED lighting in the front,
- LED lighting in canopy and under each shelf,

➤ **Insulation**

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high-density polyurethane insulation,
- Low GWP & Zero ODP effect.

➤ **Refrigeration**

- Digital temperature controller with automatic defrost system,
- Rear electronic thermostat,
- Forced air refrigeration system,
- Stainless Steel Evaporative double trays, first, by hot gas, second by electrical resistance.
- Refrigerant gas R404A,
- Case engineered to operate at 75°F and 55% relative humidity.

➤ **Electrical**

- Cord and NEMA 5-20P plug,
- Electrical connection is 115V / 1ph / 60 Hz.




➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

**OPTIONAL FEATURES**

- ✓ Customizable decoration for the front and sides,
- ✓ White color,
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

**PLAN VIEW**

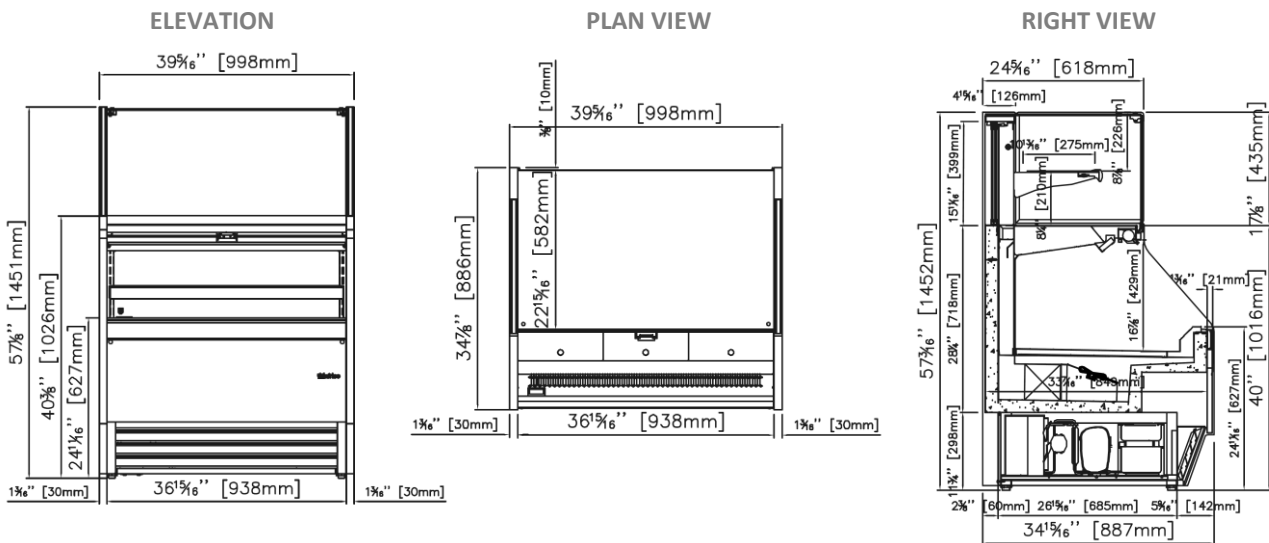

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



AUTODESK  
REVIT



**Infrico USA Corp.**  
1409 N.W. 84th Avenue  
Doral, FL 33126  
1.305.777.9599 Office  
1.305.777.9598 Fax

[www.infrico.us](http://www.infrico.us)  
[service@infrico.com](mailto:service@infrico.com)

APPROVALS: \_\_\_\_\_ AVAILABLE AT: \_\_\_\_\_