



# REACH IN REFRIGERATOR

D28ER

Bottom Mounted / Solid Door



### **i** TECHNICAL SPECIFICATIONS

- Voltage/Frequency 110V/60Hz
- Refrigerant R290
- Type of Defrost Automatic
- Interior Material Stainless Steel
- Exterior Material Stainless Steel
- Temperature Range °F 33 ~ 41°F
- Compressor Power (HP) 1/5
- Nema Config. NEMA5-15P



## PRODUCT FEATURES

- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 ~ 41° degrees Fahrenheit
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.



## HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628


info@dukersusa.com

www.DukersUSA.com


# DETAILS & SPECIFICATIONS

## D28ER

Front View

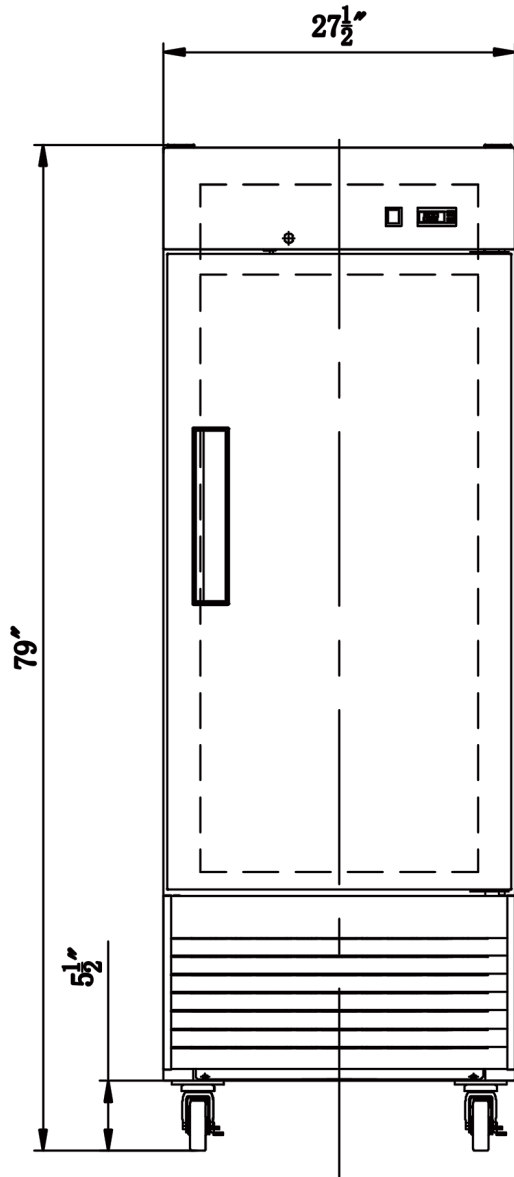

Side View

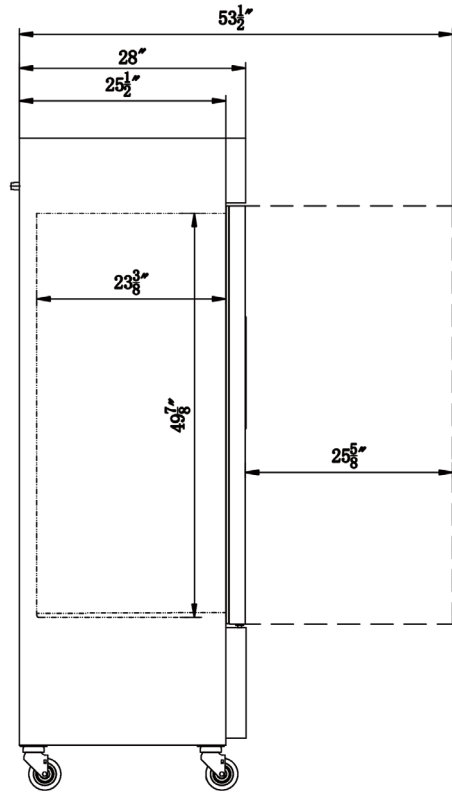

### MODEL D28ER

Rated Voltage	110V
Rated Frequency	60Hz
Total Capacity	15.94 cu ft
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D28ER	27 1/2 x 28 x 79	29 1/8 x 30 x 83	198 lbs	3	48



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com