

## Refrigeration Equipment 1-Door Refrigerated Under Counter 27" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738263 (KCHUC27R)

1-Door Refrigerated Under  
Counter 27" Long

### Short Form Specification

**Item No.** \_\_\_\_\_

1-door refrigerator counter top, 35.5 inches tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. On-site reversible door feature for units with serial number 24020014 or later. External temperature display.

R600a gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

### Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

### Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

### Optional Accessories

- 1 ADJUSTABLE FOOT PNC 206445
- Drawer Kit for 27" Undercounter PNC 880614

APPROVAL: \_\_\_\_\_

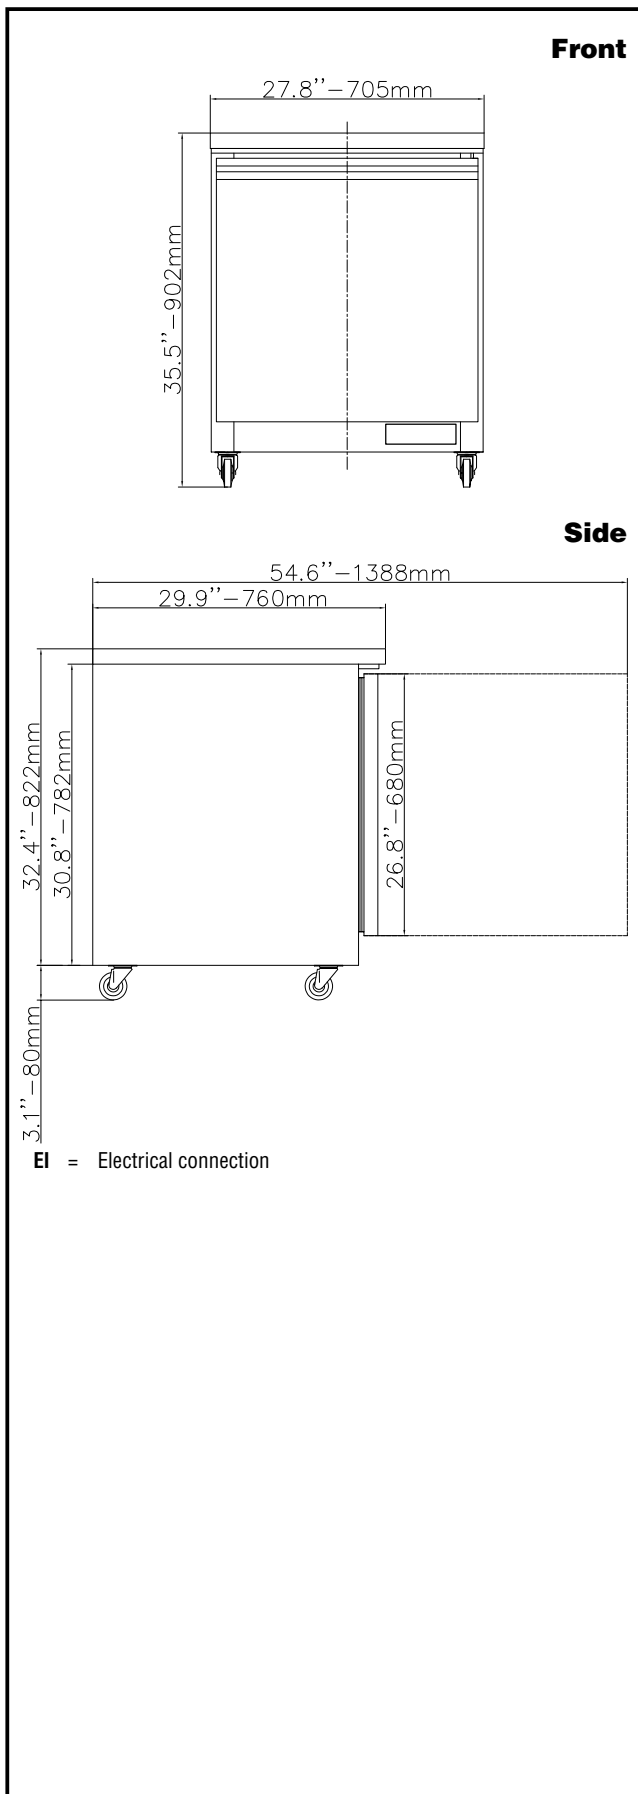

## Electric

|                        |                  |
|------------------------|------------------|
| Supply voltage:        | 115 V/1 ph/60 Hz |
| 738263 (KCHUC27R)      |                  |
| Electrical power, max: | 0.16 kW          |
| Plug type:             | USA NEMA 5-15P   |

## Capacity:

|                 |             |
|-----------------|-------------|
| Gross capacity: | 6.5 cu.feet |
|-----------------|-------------|

## Key Information:

|                                      |  |
|--------------------------------------|--|
| Door hinges:                         | Right Side                                   |
| External dimensions, Width:          | 27 3/4" (705 mm)                             |
| External dimensions, Depth:          | 29 15/16" (760 mm)                           |
| External dimensions, Height:         | 35 1/2" (902 mm)                             |
| Number and type of doors:            | 1 Full                                       |
| Internal Dimensions (depth):         | 22 13/16" / (580 mm)                         |
| Internal Dimensions (height):        | 23 1/2" / (597 mm)                           |
| Internal Dimensions (width):         | 22 1/4" / (565 mm)                           |
| Shipping height:                     | 38 3/16" (970 mm)                            |
| Shipping weight:                     | 165 lbs (75 kg)                              |
| Shipping volume:                     | 20.41 ft <sup>3</sup> (0.58 m <sup>3</sup> ) |
| Number and type of grids (included): | 1 - Vinyl-Coated Steel                       |
| Type of external material:           | Stainless Steel                              |
| Type of internal material:           | Polystyrene                                  |
| Warranty:                            | 3 / 5 years                                  |
| Approvals                            | ENERGY STAR; ETL C&US; ETL SANITATION        |

## Refrigeration Data

|                             |              |
|-----------------------------|--------------|
| Current absorbed:           | 1.5 Amps     |
| Compressor power:           | 1/10 hp      |
| Operating temperature min.: | 32 °F        |
| Operating temperature max.: | 41 °F        |
| Condenser type:             | Fin & tube   |
| Defrost type:               | Auto Defrost |

## Sustainability

|                     |       |
|---------------------|-------|
| Refrigerant type:   | R600a |
| GWP Index:          | 3     |
| Refrigerant weight: | 70 g  |

