



## TRAC 321

### Automatic Tray Washer

- 528 Trays Per Hour | 15" Tray
- Optional Tray Dryer and Stacker Add-Ons
- Single Tank Configuration
- Made in the USA

### STANDARD FEATURES

- Capillary thermometers for wash and rinse
- In-line thermometer for final rinse
- Vacuum breaker on all incoming water lines
- Manifold clean-out brush
- Vents with adjustable damper controls
- Single point electrical connection: motor, controls and tank heat (Booster requires a separate connection)
- Inspection door
- Stainless steel frame, legs and feet
- Stainless steel front enclosure panel
- Automatic tank fill
- Low water protection
- Detergent connection provision
- Top mounted NEMA 12 control panel
- Simplified scrap screen design
- Door safety switch
- Standard frame drip proof motors

- Override switch for de-liming
- End caps/pipe plugs secured to prevent loss
- Tray unload table

### OPTIONS

- Stainless steel steam coil tank heat
- Steam booster
- Electric booster
- Pressure reduction valve and line strainer
- Security package
- Insulated hood and door
- Chemical sanitizer injector package for low temperature operations (pump by others)
- Tray Dryer
- Tray Stacker

### SPECIFIER STATEMENT

Specified unit will be an Insinger TRAC 321 automatic single tank tray washer. Features include capillary thermometers for wash and rinse, inline thermometer for final rinse, vacuum breaker, vents with adjustable damper controls, inspection door, 304 stainless steel construction, automatic tank fill, low water protection, door safety switch, and a tray unload table.



## SPECIFICATIONS


Capacity	Trays Per Hour	528
Heating & Venting	Wash Tank Heat	15 kW
	Booster Heat (40°F Rise)	27 kW
	Booster Heat (70°F Rise)	45 kW
	Venting (Load End)	100 CFM
	Venting (Unload End)	300 CFM
Water	Water Inlet Temperature	110°F
	Water Consumption (20 PSI)	248 gal/hr
	Wash Tank Capacity	24.1 gal
	Peak Drain Flow	9 gal/min
Steam	Steam Tank Consumption (20 PSI)	54 lbs/hr
Other	Drive Motor HP	1/15
	Wash Motor HP	9
	Shipping Weight	700

## ELECTRICAL


		Electric (TRAC)	27 kw Booster	45 kw Booster
Electrical Options	208/60/3	50.1 amps	75 amps	125 amps
	240/60/3	43.9 amps	65 amps	108.3 amps
	380/50/3	27.5 amps	Contact Factory	
	480/60/3	21.9 amps	32.5 amps	54.2 amps
<b>Steam</b>				
Electrical Options	208/60/3	8.5 amps		
	240/60/3	7.8 amps		
	380/50/3	4.7 amps		
	480/60/3	3.9 amps		

Contact Insinger Sales at 800-344-4802 for an installation drawing specific to your application.  
 Note: Due to product improvement we reserve the right to change information and specifications without notice.

# TECHNICAL DRAWINGS

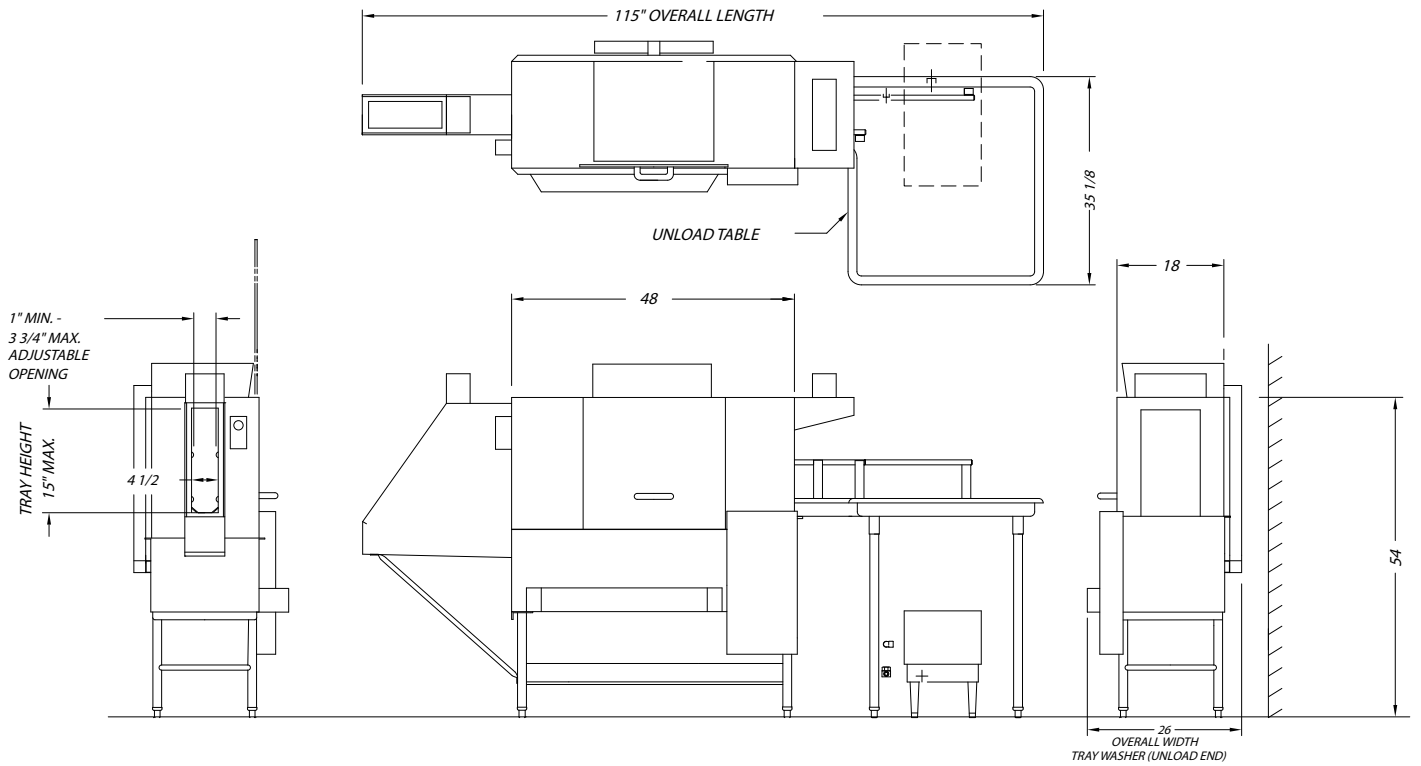

LEFT TO RIGHT FEED

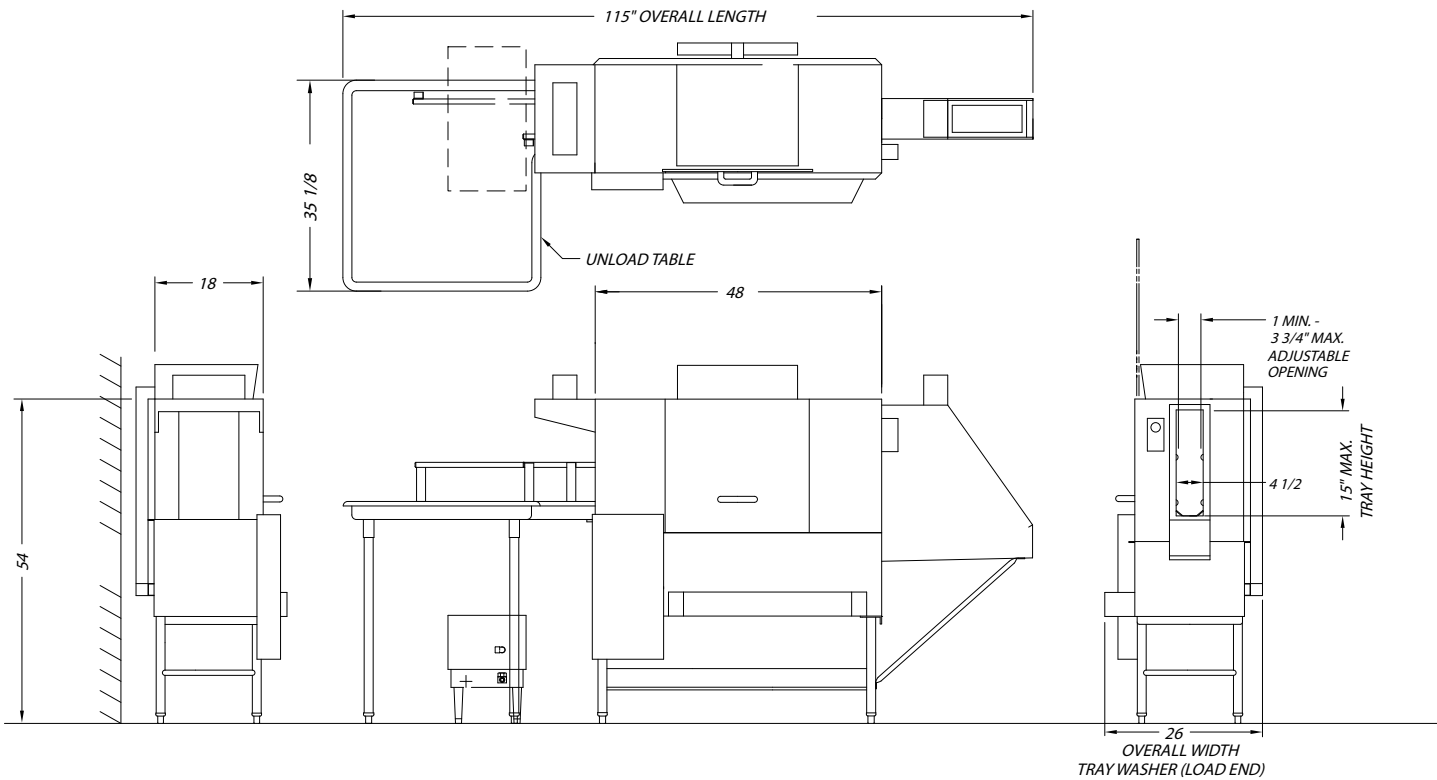

RIGHT TO LEFT FEED

Contact Insinger Sales at 800-344-4802 for an installation drawing specific to your application.  
 Note: Due to product improvement we reserve the right to change information and specifications without notice.