



W8

Vacuum pack machines



W8 40 DX



W8 50 DX DB

Exclusively designed with a stainless steel 304 flat vacuum chamber, the easiest to clean in the market
 Thick transparent dome for viewing the process from start to finish
 Digital LED display, water resistant. Electronic millbar sensor
 Built-in cycle counter with oil change reminder
 Removable seal bars
 Slide for liquids comes standard

14 vacuum programs:

10 customizable - vacuum and seal time programming

AA automatic

LA liquid automatic - stops and goes twice to avoid liquid boil

XT external - manual, set up vacuum and seal time. To use with optional hose and containers

XA external automatic. To use with optional hose and containers

EASY models: simple vacuum and seal time controls

Optional:

Thermal Label Printer - factory installed, not available on EASY Versions

12" Seal bar with cut-off wire

16" Seal bar with cut-off wire

20" Seal bar with cut-off wire

Reinforced gastronorm containers and lids

External vacuum hose, to be used with gastronorm containers and lids

RANGE

	Seal bar inch.	Pump m3/h
W8 30 DX EASY	12 ¹ / ₄ "	9
W8 40 DX EASY	16 ¹ / ₈ "	14
W8 40 DX	16 ¹ / ₈ "	24
W8 50 DX	20 ¹ / ₁₆ "	24
W8 50 DX S+G (SOFT AIR + GAS FLUSH READY)	20 ¹ / ₁₆ "	24
W8 50 DX DB (1 LEFT 1 RIGHT SEAL BARS)	2 x 16 ¹ / ₈ "	24
W8 70 DX TB (3 SEAL BARS)	1 x 25 ¹ / ₄ " 2 x 16 ¹ / ₈ "	48



Certified to UL Standard 963 and NSF Standard 169
Certified to CSA Standard C22.2

Vacuum-pack machines
Sous-vide cookers



W8 70 DX TB



W8 30 DX EASY



The easiest and most thorough sanitation



SIRMAN USA, Inc. 9490 Franklin Avenue Franklin Park, IL 60131 U.S.A.

Phone: +1 847-288-9500
Toll free: 866-643-6872

sirmanusa@sirman.com
www.sirman.com



W8 TOP

Vacuum pack machines



W8 TOP 40 DX
with inert gas and AOR options



W8 TOP 50 DX



Google play



Available on the
App Store

Sirman APP for W8 TOP

- Practical and intuitive touch screen display
- Electronic control system with pressure sensor for fast and precise processing
- Adjustable automatic vacuum percentage: 50-100%
- Dedicated programs for liquids and marinating
- 10 different settings savable to preference
- 6 selectable languages
- Set up sealing, vacuum, and gas time on a 1-10 sec scale
- Display of vacuum percentage and time to countdown
- Scheduled management of maintenance operations to ensure longer-lasting life oil and filter change warning light
- Thermal pump guard
- Oil preheat and cleaning cycle
- Total rev counter
- Pump meter
- Built-in Wi-Fi card which allows careful management of after-sales service at a distance
- 3-year pump warranty (for machines connected via Wi-Fi)
- Fully manageable via APP that is easy and intuitive and can be downloaded free-of-charge from official stores

Optionals:

Inert gas system (MAP) and soft air


Automatic thermal printer by date, time and packing specifications

A.O.R. Automatic Oil Replacement

SanO3 - Patented - is an integrated and automated sanitizing system that works with an ozone generating cell to deeply sanitize the chamber and all the air pipes reaching the best result where other sanitizing procedures cannot get. Available only on W8 TOP 40, 50 and 70



Certified to UL Standard 963 and NSF Standard 169
Certified to CSA Standard C22.2

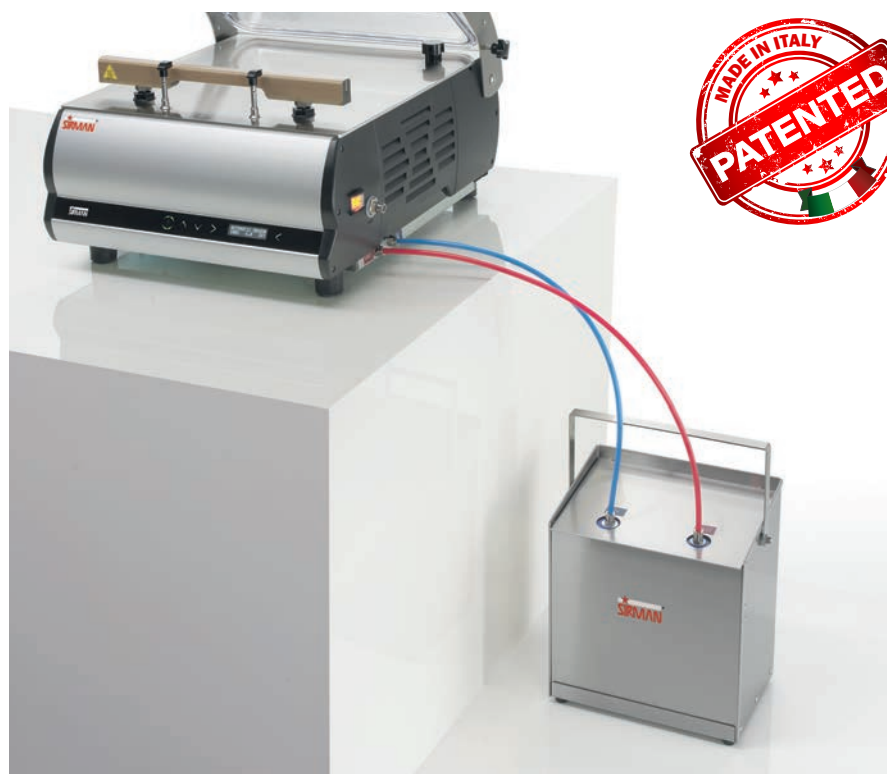

A.O.R.

Automatic Oil Replacement, an exclusive patent by Sirman, always in pole position for vacuum and sous vide technology. The machine automatically manages the oil changing, preserving the pump from damage and thus extending the warranty of the pump to 3 years (for machines connected via Wi-Fi).



Thermal label printer - option



Standard support for vacuum bags with liquids



Easy access for oil change and service



Optional adhesive paper for built-in printer



W8 50 DX DB
1 left and 1 right seal bars design



W8 70 DX TB
3 seal bars design



W8 50 DX G
with inert gas flush ready



External vacuum: hose + GN container + lid
Reinforced Gastronorm Containers and s/steel Lids



External vacuum: hose + GN container + lid
Reinforced Gastronorm Containers and Lids




W8 Top 40-50 DX G
Option inert gas and A.O.R.



W8 Top 40-50 DX

		W8 30 DX EASY	W8 40 DX W8 40 DX EASY W8 Top 40 DX	W8 50 DX DB	W8 50 DX W8 50 DX S+G W8 Top 40 DX
bag size	capacity	bags/cycle	bags/cycle	bags/cycle	bags/cycle
5" x 7"	.5 pt - .5 lb	2	3	6	4
6" x 8"	.5 pt - .5 lb	2	2	4	3
8" x 12"	1 qt - 2 lb	1	2	4	2
10" x 12"	1.5 qt - 3 lb	1	1	2	2
10" x 15"	3 qt - 6 lb	1	1	2	2
12" x 14"	1 gal - 8 lb	1	1	2	1
12" x 16"	1 gal - 8 lb	1	1	2	1
12" x 18"	1.25 gal - 10 lb	1	1	2	1
14" x 20"	1.75 gal - 14 lb	--	1	2	1
16" x 22"	2.5 gal - 20 lb	--	1	2	1

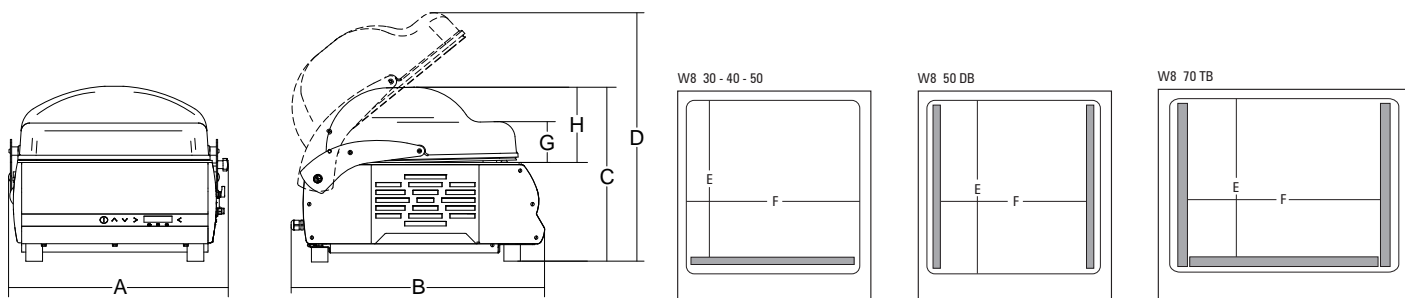

	Electrical	Seal bar	Pump	Chamber dimensions	A	B	C	D	E	F	Net weight	Shipping	Gross weight
		inch.	m3/h	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
W8 30 DX EASY	120V/15A/350W	12 ¹ / ₄ "	9	13 ³ / ₈ " x 14 ³ / ₁₆ " x 6 ³ / ₄ "	16"	20 ³ / ₄ "	16"	23 ¹ / ₈ "	13 ¹ / ₈ "	13 ¹ / ₈ "	83	29" x 23" x 31"	105
W8 40 DX EASY	120V/15A/1000W	16 ¹ / ₈ "	14	17" x 16 ¹ / ₈ " x 7 ¹ / ₈ "	19 ¹ / ₂ "	23"	16 ⁵ / ₈ "	24 ³ / ₄ "	15 ³ / ₈ "	17"	123	30" x 26" x 31"	145
W8 40 DX	120V/20A/1000W	16 ¹ / ₈ "	24	17" x 16 ¹ / ₈ " x 7 ¹ / ₈ "	19 ¹ / ₂ "	23"	16 ⁵ / ₈ "	24 ³ / ₄ "	15 ³ / ₈ "	17"	123	30" x 26" x 31"	145
W8 50 DX	120V/20A/1000W	20 ¹ / ₁₆ "	24	21 ¹ / ₂ " x 18 ¹ / ₈ " x 8 ¹ / ₄ "	24"	25 ¹ / ₂ "	16 ⁵ / ₈ "	23 ⁷ / ₈ "	16 ⁷ / ₈ "	21 ¹ / ₄ "	155	34" x 34" x 30"	190
W8 50 DX G (GAS FLUSH READY)	120V/20A/1000W	20 ¹ / ₁₆ "	24	21 ¹ / ₂ " x 18 ¹ / ₈ " x 8 ¹ / ₄ "	24"	25 ¹ / ₂ "	16 ⁵ / ₈ "	23 ⁷ / ₈ "	16 ⁷ / ₈ "	21 ¹ / ₄ "	155	34" x 34" x 30"	190
W8 50 DX DB (1 LEFT 1 RIGHT SEAL BARS)	120V/20A/1000W	2 x 16 ¹ / ₈ "	24	21 ¹ / ₂ " x 18 ¹ / ₈ " x 8 ¹ / ₄ "	24"	25 ¹ / ₂ "	16 ⁵ / ₈ "	23 ⁷ / ₈ "	16 ⁷ / ₈ "	16 ⁷ / ₈ "	165	34" x 34" x 30"	195
W8 70 DX TB (3 SEAL BARS)	220V/3PHASE 6A/1200W	1 x 25 ¹ / ₄ " 2 x 16 ¹ / ₈ "	48	30 ³ / ₄ " x 19 ¹ / ₃ " x 8 ¹ / ₄ "	34 ¹ / ₂ "	26 ¹ / ₂ "	44 ⁵ / ₈ "	53 ⁷ / ₈ "	16 ³ / ₄ "	26"	370	32" x 48" x 53"	282
W8 Top 40 DX	120V/20A/1000W	16 ¹ / ₈ "	24	17" x 16 ¹ / ₈ " x 7 ¹ / ₈ "	19 ¹ / ₂ "	23"	16 ⁵ / ₈ "	24 ³ / ₄ "	15 ³ / ₈ "	17"	123	30" x 26" x 31"	145
W8 Top 50 DX	120V/20A/1000W	20 ¹ / ₁₆ "	24	21 ¹ / ₂ " x 18 ¹ / ₈ " x 8 ¹ / ₄ "	24"	25 ¹ / ₂ "	16 ⁵ / ₈ "	23 ⁷ / ₈ "	16 ⁷ / ₈ "	21 ¹ / ₄ "	155	34" x 34" x 30"	190