

DELTA NG 120 R290 115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES THAT AVOID LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKLIN OR SIMILAR) WITHOUT COOLING
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM TO 155MM



	24 H	70°F/20°C 50°F/10°C	90°F/32°C 70°F/21°C	lbs (Kg)	in (mm)	in (mm)	
DELTA NG 120 A		108 (49)	95 (43)	44 (20)	Width 18.31" (465) Depth 23.43" (595) Height* 31.06" (789)	Width 21.26" (540) Depth 25.98" (660) Height 36.22" (920)	DELTA 40gr 1.57" (Ø) x 1.73" (H) 40 (Ø) x 44 mm (H) Average dimensions
DELTA NG 120 W		- (-)	- (-)				

* WITH LEGS 35.20"/37.17"(894/944)

ACCESSORIES


INCLUDED



6" HEIGHT ADJUSTABLE LEG KIT

SCOOP

NOT INCLUDED (OPTIONAL)

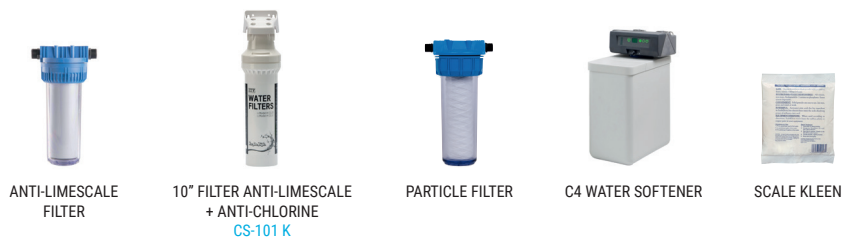

ANTI-LIMESCALE FILTER

10" FILTER ANTI-LIMESCALE + ANTI-CHLORINE CS-101 K


PARTICLE FILTER

C4 WATER SOFTENER

SCALE KLEEN

TECHNICAL SCHEME

DELTA NG 120

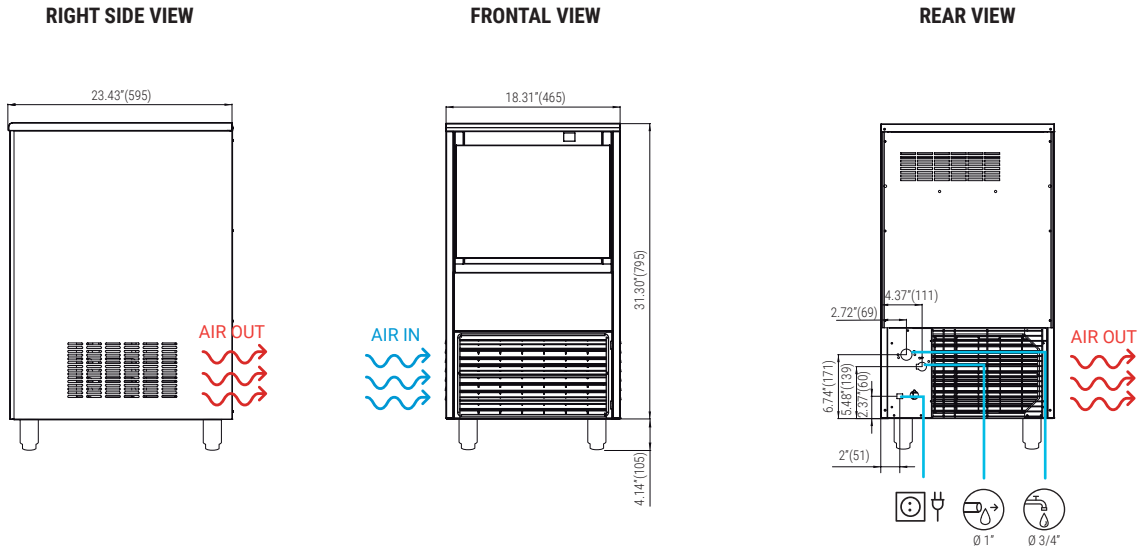

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V
41°F/109°F
41°F/95°F
14.5 psi (1 bar) / 87 psi (6 bar)
24 Ice cubes/cycle

R290

		DELTA NG 120 AIR COOLED					DELTA NG 120 WATER COOLED				
		50° 10°	60° 15°	70° 21°	86° 30°	50° 10°	60° 15°	70° 21°	86° 30°		
50° 10°		108	106	101	95	-	-	-	-		
68° 21°		108	104	99	93	-	-	-	-		
90° 32°		101	97	95	90	-	-	-	-		
109° 43°		93	86	82	75	-	-	-	-		

V | Hz | pH
115 | 60 | 1N

MODELS	ASHRAE CONDITIONS (BTu/h) (W)	(W) 109°F	(A)	(AWG/mm²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTu/h) (W)	(lbs)	(lbs)
DELTA NG 120 A	4,163 1,220	382	-	16/1.5 3	10	8.6	44.3 6.6	3,333 889	99	123
DELTA NG 120 W	-	-	-	-	-	-	-	-	-	-



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

