

**D55F** 

Bottom Mounted / 2-Solid Door





### i TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
1-15V/60Hz
R290
Automatic
Stainless Steel
Stainless Steel
15V/60Hz
Automatic
Stainless Steel
15V/60Hz
Automatic
Stainless Steel
15V/60Hz

Nema Config. NEMA5-15P



## **PRODUCT FEATURES**

- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.






Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628

info@dukersusa.com


www.DukersUSA.com

# **DETAILS & SPECIFICATIONS**

### **D55F**

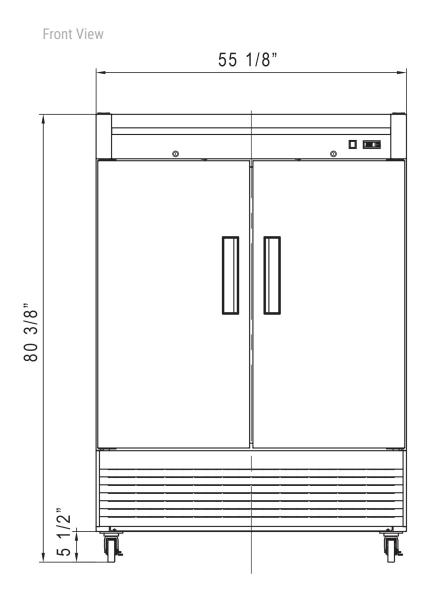

#### Side View



#### **MODEL D55F**

115V Rated Voltage Rated Frequency 60Hz **Total Input Power** 1250W **Total Current** 11.8 A 40.74 cu ft **Total Capacity** 4-5 **Climatic Category Protection Type** Design Pressure High Side **300 PSIG** Design Pressure Low Side **150 PSIG Insulation Blowing Gas** C-Pentane R290/5.11 oz Refrigerant

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D55F	55 1/8 x 32 5/8 x 80 3/8	57 1/8 x 34 5/8 x 82 3/8	463 lbs	8	21















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com

www.DukersUSA.com