

## **Undercounters**

## 24" Undercounter Refrigerator SKR24A-ESUS1

Specification Sheet



### **Features**

#### **Eco-Friendly Refrigerant**

R290 refrigerant with a global warming potential (GWP) of 3

#### **Easy to Clean**

Aluminum interior, coved corners, finished edges, and removable shelves

#### **High-Strength Door**

Heavy-duty, stainless steel door assembled using high-load brackets for long lasting durability

#### **Long-Lasting, Removable Gaskets**

Santoprene™ gaskets last four times longer than standard gaskets

#### **High-Density Insulation**

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

#### **High-Efficiency Refrigeration System**

Forced air circulation provides uniform temperature throughout the cabinet

#### **Cabinet Capacity**

Internal area of 3.6ft<sup>3</sup> with two (2) heavygauge wire shelves — adjustable in 1/2" increments using stainless steel pilasters

#### **Heavy-Duty Soft Casters**

Secured to a 12 gauge steel base to ensure years of worry-free operation

#### **Stainless Steel Exterior**

Galvanized back and bottom to reduce the risk of corrosion







# Undercounters 24" Undercounter Refrigerator

SKR24A-ESUS1

Specification Sheet

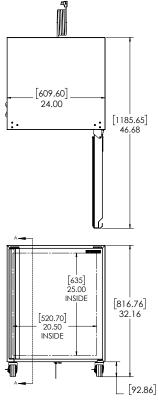



#### **Technical Specifications**

Electrical Requirements	115v/60hz/1ph/2.4A/NEMA 5-15P Plug
Product Dimensions	27"W x 32.15"H x 29.32"D (68.58cm x 81.66cm x 74.47cm)
Product Weight	125lbs (56.70kg)
Shipping Dimensions	30"W x 37"H x 29"D (76.20cm x 93.98cm x 73.66cm)
Shipping Weight	140lbs (63.50kg)
Shipping Cubic Dimensions	18.63ft <sup>3</sup> (.53m <sup>3</sup> )
Temperature Range	36 to 38 (2.22 to 3.33°C)
Refrigerant	R290

Insulation	Foamed-in-place, CFC-free polyurethane
Exterior Construction	Stainless steel exterior with galvanized back and bottom
Interior Construction	Aluminum interior with coved corners and finished edges
Doors	One (1) right-hand swing door
Interior Capacity	3.6ft <sup>3</sup>
Door/Drawer Gasket	Santoprene™ gasket
Shelves	Two (2) heavy-gauge wire shelves
Casters	Four (4) 3" heavy-duty soft casters (two locking)
Certifications	ETL Safety, ETL Sanitation
Warranty	1-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKR24A-ESUS1	Undercounter Refrigerator 24", 115v/60hz/1ph, single right-hand swing door, 3" heavy-duty soft casters (two locking), NEMA 5-15P

To learn more about Silver King Undercounter Refrigerator, visit silverking.com

