



- On-site accurate blending of CO<sub>2</sub> and Nitrogen gases.
- Save money by not purchasing expensive premixed cylinders.
- Save labor by not changing cylinders.
- Increase profits by serving a consistent perfect pint.




# Specifications

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> <a href="#">MM100</a>	Ales/Lagers: 70% CO2/30% N2	4 kg	406mm L x 305mm W x 229mm H
		8 lbs	16"L x 12"W x 9"H

# Performance

<b>Inlet Barb:</b>	9.52mm (3/8")
<b>Outlet Barb:</b>	9.52mm (3/8")
<b>Inlet Pressure:</b>	3.80 bar minimum (50 psi minimum)
<b>Outlet Pressure:</b>	Factory preset at 3.45 bar (50 psi), non-adjustable
<b>Accuracy and Flow Range:</b>	2% of full scale or better within the flow range of .4 to 40 liters per minute (.85 to 85 cubic feet per hour.)

# Dimensions

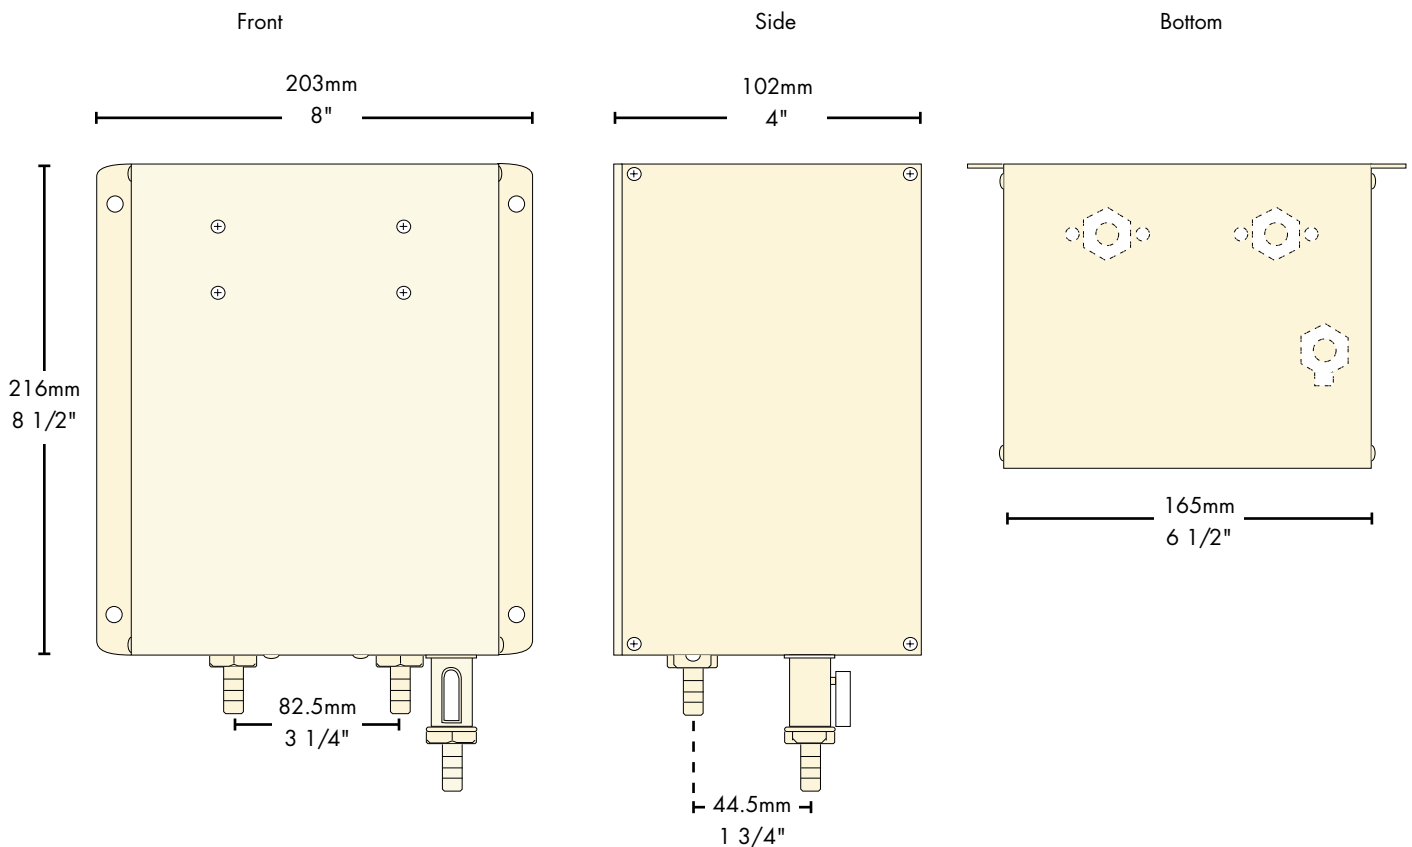

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00145D0312



[www.micromatic.com](http://www.micromatic.com)

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466