# BACK BAR EQUIPMENT

## Model: KC59SN

Natural Refrigerant R-290 Model

# 59" Keg Cooler - Shallow Depth

Textured baked black enamel finish exterior, stainless steel countertop, interior back and side panels with reinforced stainless steel floor.



## **Options and Accessories**

(upcharge and lead times may apply)		
Epoxy coated or stainless steel shelves	Faucet lock	
Hinged glass doors (consult factory)	Riser base* (field installed)	
Food storage rated stainless steel interior (NSF-7)	Condensing unit on right	
Single, dual or triple faucets	Wine rack	
Tower placement (consult factory)	Casters or legs	
Standard depth		

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2"



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

## **Standard Model Features**

### **REFRIGERATION SYSTEM**

Performance rated front breathing refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

### CABINET ARCHITECTURE

High density, non-CFC polyurethane<br/>foamed-in-place insulationFront, rear and side venting louvered grillsMagnetic snap in Santoprene™ door gasketsCylinder-keyed security lock in each doorStainless steel reinforced threshold

### **MODEL FEATURES**

Low profile cabinet design

Electronic controller with digital display & hi-low alarm

Continuously cooled, 3" diameter beer column with lever faucet,  $CO_2$  pressure relief distributor and  $CO_2$  tubing with clamps

Easily removable stainless steel drip grate with convenient front mounted cleanout drainage hose (pan not removable) Off-cycle defrost

Easily accessible and serviceable condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## **Model Specifications**

## **Model Plan Views**

#### DIMENSIONAL DATA

Net Capacity (cubic feet)	15 (425 cu l)
Width, Overall (inches)	59 (1499 mm)
Depth, Overall (inches) (including handles & bumpers)	25 ¾16 (640 mm)
Depth, Body Only (inches) (less doors)	21 (533 mm)
Height, Overall (inches) (not including columns)	34 ¾ (883 mm)
Capacity: # Barrel Kegs	2
Capacity: # Straight Wall Kegs	2
Capacity : # 1/6 Size Kegs	8
Number of Doors	2
Number of Beer Columns (with single faucets)	2

### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	2025

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	3.7 (3.4)
10 ft. Cord/Plug [attached] (International)	Yes (No)

### **SHIPPING DATA**

Weight (pounds)	385 (175 kg)
Height - Crated (inches)	46 (1168 mm)
Width - Crated (inches)	65 (1651 mm)
Depth - Crated (inches)	42 (1067 mm)

\* Rating @ +25°F evaporator, 90°F ambient


Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Toll-Free: 800-523-7138 Phone: 215-244-1400

www.continentalrefrigerator.com

udly Designed and

Fax: 215-244-9579 539 Dunksferry Road Bensalem, PA 19020






Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

59" (1499 mm) ġ đ 0 000000 43 7/16" (1103 mm) 34 3/4" 28 11/16" 19 3/16" (883 mm) ental | (729 mm) (487 mm) 00000 00000 FRONT VIEW

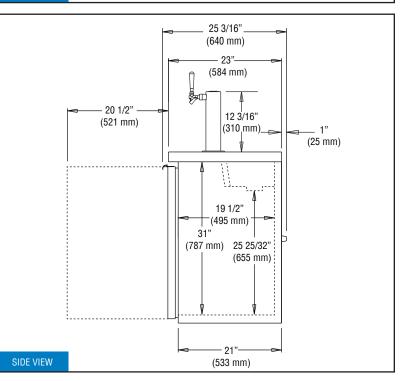

**IMPORTANT NOTE**: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet <u>must</u> not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.