DUAL-TEMPERATURE WINE DISPENSER



PRO-LINE™ WINE E-SERIES™ 36" - 4 KEG

- Designed by wine-industry experts for performance and value.
- Two dedicated temperature zones for optimal wine dispensing.
- Pre-drilled for customer tower choice.
- Commercial grade construction built to last.



MDD36W-E

Black

Shown: Wine Font MTM-4PSS-W and Drip Tray DP-1020. Order Separately.



Dual-Temperature: Built-In Digital Thermostats





Listed by Edison Testing Laboratories. Conforms to UL & NSF Standards.

PRO-LINE™ WINE E-SERIES™ 36" - 4 KEG www.micromatic.com • 1 (866) 327-4159

Job Number:_ Location: _





Part No.	Exterior	Doors	Shipping Weight
□ MDD36W-E	Black	1	78 kg
			172 lbs
□ MDD36SW-E	Stainless Steel	1	78 kg
			172 lbs


Operating Performance

Capacity of 20 Liter Kegs	4 (2 per zone)
Cubic Feet (liters)	TBD
Hole for Wine Font	1
Hole Diameter	3"
Color-coded Digital Thermostats	2 (Blue LED-Whites & Red LED-Reds)
Temperature Range - Whites	42-48°F (5.5 - 8.8°C)
Temperature Tange - Reds	55-65°F (12.7 - 18.3°C)
Approval	ETL Listed

Running Amps	1.5
Condenser HP	1/10
Voltage	115/60/1
Plug Type	NEMA-5-15P
Cord Length	8'
Refrigerant	R290
Charge oz	3.5

Exterior	18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back	
Interior	20 gauge stainless steel floor and walls	
Ventilation	Front ventilated	
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.	
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor	
Accessories	Casters or 6" fixed legs	

Dimensions

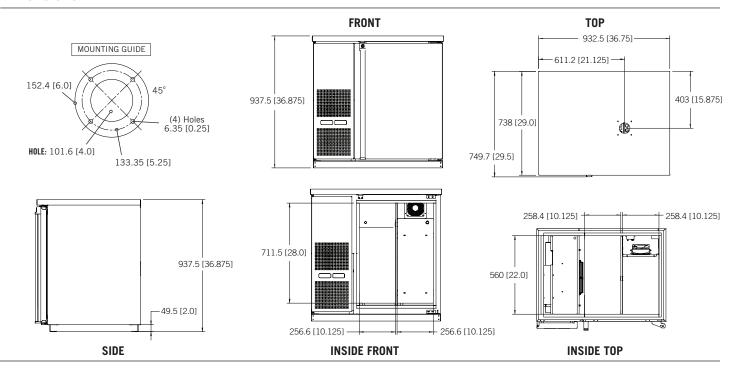



Toll-Free: 1-866-327-4159 www.micromatic.com

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557

Southeast

2386 Simon Ct. Brooksville, FL 34604 Tel. (352) 799-6331

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466