

Prodigi™ Pro 7-20/7-20 Stacked (E/G)

Electric or Gas

UL

Engineered for dependability, connectivity, and cost savings, Prodigi™ Pro combination ovens are an all-in-one solution for efficient and consistent food production. These ovens do the work of a convection oven, kettle, steamer, fryer, smoker and more. With advanced features and accessories and an intelligent, customizable control, Prodigi Pro combination ovens are designed to support—and connect—the most demanding kitchens.

ALTO-SHAAM



7-20 / 7-20

Standard features

- Boilerless steam generation
- Absolute Humidity Control™ for selecting any humidity level from 0-100% to maximize food quality, texture, and yield
- Three cooking modes—steam, convection, and combination
- 10.1" programmable, touchscreen control with customizable home screen options, recipe categorization and filtering, lockout features and more
- Easy recipe upload/download via USB port
- ChefLinc™ remote oven management to push and pull recipes, software or oven settings from anywhere
- Five fully automated cleaning cycles
- Front-accessible and retractable rinse hose
- LED illuminated door handle to provide visual notification of the oven status
- SafeVent™ automatic steam venting at the end of the cooking cycle
- Zero clearance design
- EPA 202 compliant
- Temperature range: 85°F to 550°F (30°C to 302°C)



CAPACITY
Per oven

- 7** Seven full-size sheet pans;
Sixteen* GN 1/1 pans, two rows deep
[*one less on models with smokers]
14 half-size sheet pans
- Two side racks with eight non-tilt support rails; 19-7/8"
(505mm) horizontal width between rails, 2-3/4"
(70mm) vertical spacing between rails
- 168 lb (76 kg) kg product maximum
- 105 quarts (133 liters) liters volume maximum
- Four (4) wire shelves included.

Copper Installation kits

Base kit selection on amp draw found in electrical table

Electric

- 20A [5026970]
- 30A [5026932]
- 40A [5026972]
- 50A [5026973]
- 80A [5026974]
- 125A [5026977]
- 175A [5026978]
- 200A [5026979]

Gas

- 20A [5026980]
- 30A [5026933]
- No cord [5026971]

CPVC Installation kits

Base kit selection on amp draw found in electrical table

Electric

- 20A [5021521]
- 30A [5021519]
- 40A [5021525]
- 50A [5021526]
- 80A [5021527]
- 125A [5021529]
- 150A [5021530]
- 200A [5021531]
- 250A [5021531]

Gas

- 20A [5021522]
- 30A [5021520]
- No cord [5021524]

Configuration for Electric Models (select one)

- Turbo (Increased energy usage for quicker preheat and recovery times)
- ECO (Designed for energy conservation—reference power requirements)

Configuration for Gas Models (select one)

- Natural gas
- Propane

Electrical (select one)

- 120V 1ph (Gas only)
- 208–240V 1ph (Gas only)
- 208–240V 3ph
- 440–480V 3ph

Door swing (select one)

- Right hinged
- Recessed door, optional (not available on ventless hood models)

ChefLinc connection

- Wi-Fi (standard)
- Ethernet (optional)

Options (select all that apply)

- Ventech™ Hood*
 - Ventech™ PLUS Hood*
 - CombiSmoke® feature—smoke hot or cold with real wood chips (not available on units with Ventech hoods or units with security devices)
 - Automatic grease collection system
- *Electric models only

Cleaning (select one)

- Automatic tablet-based cleaning system (standard)
- Automatic liquid cleaning system (optional)

Probe choices

- Removable, quick-release, T-style probe [PR-37158] (standard)
- Removable, single-point, sous vide probe [PR-36576] (optional)
- Removable probe with stop for grease collection [5035704]

Security devices for correctional facility use

- Optional base package (not available with recessed door): includes tamper-proof screw package
- Anti-entrapment device [5017157] (optional)
- Control panel security cover [5017145] (optional)
- Hasp door lock (padlock not included) [5017144] (optional)

Water treatment

- RO System OPS175CR/10 10-gallon [5031207]
- RO System OPS175CR/16 16-gallon [5031208]
- Water Filtration System [5037376]

Extended warranty

- One-year warranty extension

Installation options (select one)

- Alto-Shaam Factory Authorized Installation Program — available in the U.S. and Canada only
- Installation Start-Up Check — available through an Alto-Shaam authorized service agency

[Accessories \(reference accessory catalog\)](#)



COA# 5760
Electric models only





This equipment is UL listed for ventless operation. Ventless certification is for all food items, including foods classified as "fatty raw proteins." These foods include bone-in, skin-on chicken, raw hamburger meat, raw sausage, steaks, etc. Always consult local HVAC codes and authorities to ensure compliance with ventilation requirements. If you require further assistance, or local authorities and/or jurisdictions reject your request, please contact our dedicated Regulatory Compliance team.

Prodigi™ Pro 7-20/7-20 Stacked (E/G)



DIMENSIONS — standard door

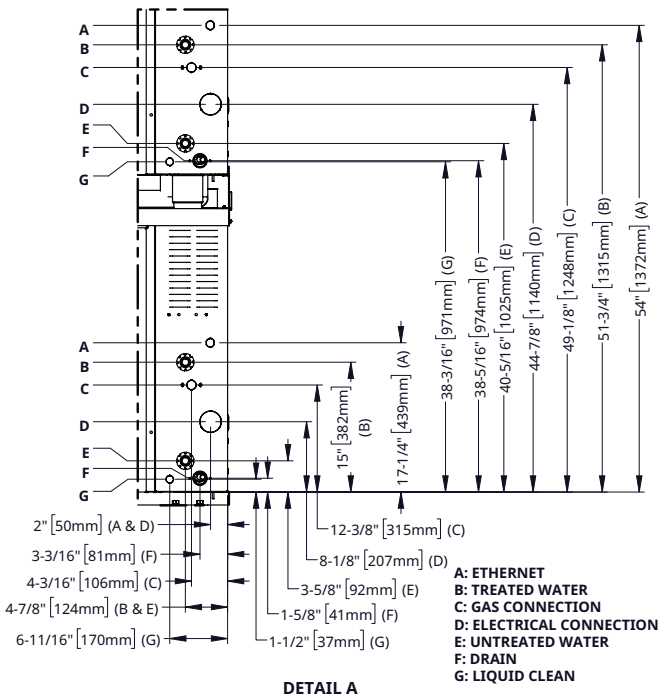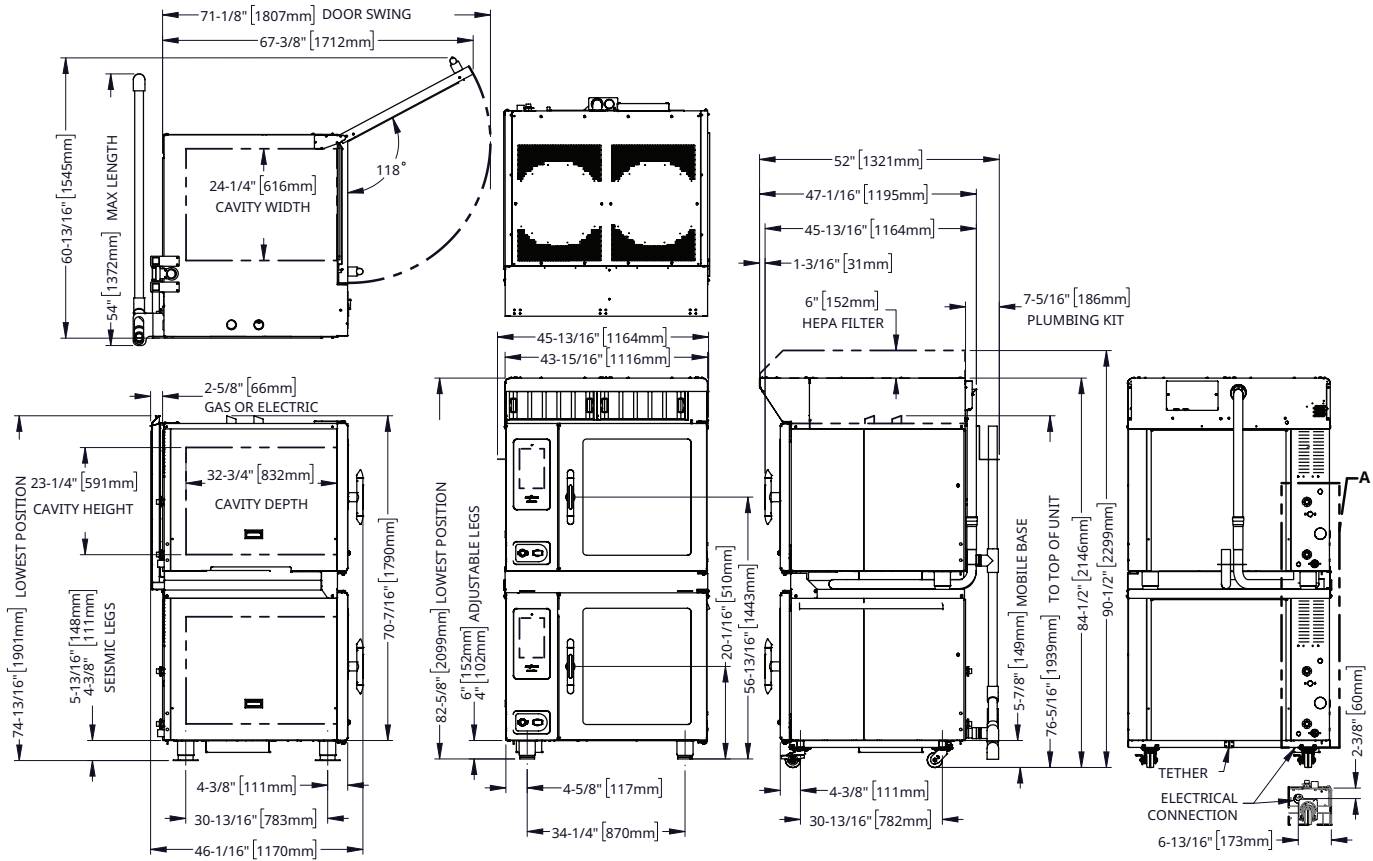

DETAIL A

Model 7-20/7-20

Exterior (H x W x D)

74-13/16" x 45-13/16" x 45-13/16" [1901mm x 1164mm x 1164mm]

Net Weight

1260 lb [572 kg]

Ship Dimensions (L x W x H)*

53" x 53" x 87" [1346mm x 1346mm x 2210mm]

Ship Weight

Call factory

*Domestic ground shipping information. Contact factory for export weight and dimensions.



Stacked Combination	Kit Number	Kit for Field Stacking	Kit for Grease Collection	Kit for Field Stacking Grease Collection
7-20E over 7-20E	5016710	5016710R	5018648	5018648R
7-20E over 7-20G	5016707	5016707R	5018649	5018649R
7-20G over 7-20G	5016707	5016707R	5018649	5018649R
7-20G over 7-20E	5016710	5016710R	5018648	5018648R

RH skirt for field stacking: 5029985R. Note: When using 5029985R, remove LH skirt.

Prodigi™ Pro 7-20/7-20 Stacked (E/G)



DIMENSIONS — recessed door

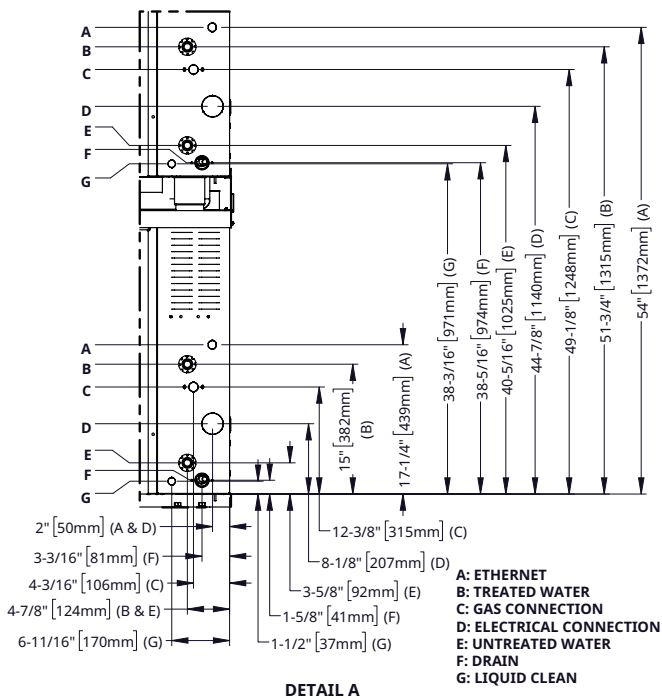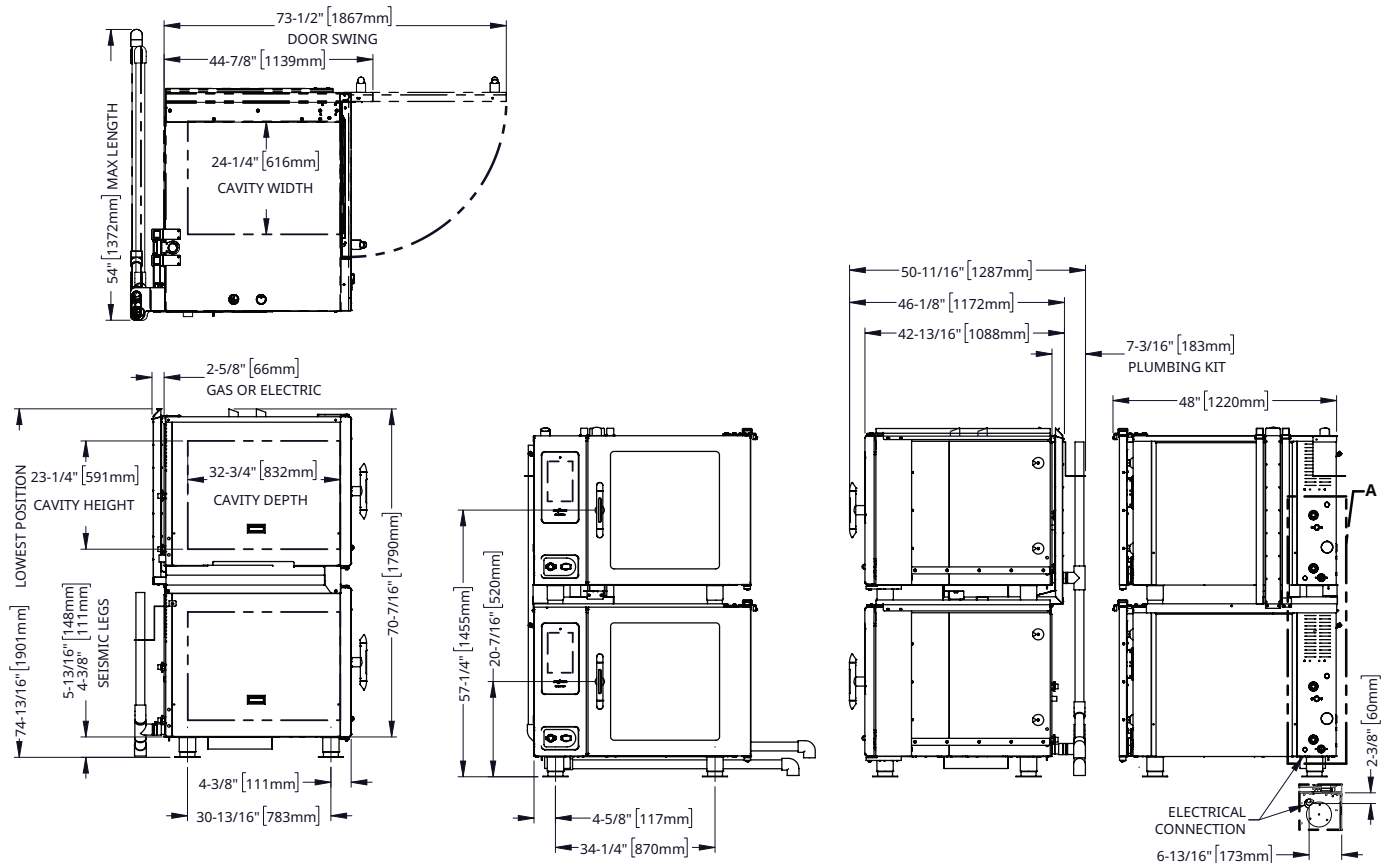

Model 7-20/7-20

Exterior (H x W x D)

74-13/16" x 48" x 46-1/8" [1901mm x 1219mm x 1172mm]

Net Weight

1260 lb [572 kg]

Ship Dimensions (L x W x H)*

53" x 53" x 87" [1346mm x 1346mm x 2210mm]

Ship Weight

Call factory



*Domestic ground shipping information. Contact factory for export weight and dimensions.

Stacked Combination	Kit Number
7-20E over 7-20E	5017845
7-20E over 7-20G	5017834
7-20G over 7-20G	5017834
7-20G over 7-20E	5017845

Prodigi™ Pro 7-20/7-20 Stacked (E/G)



DIMENSIONS — seismic stack

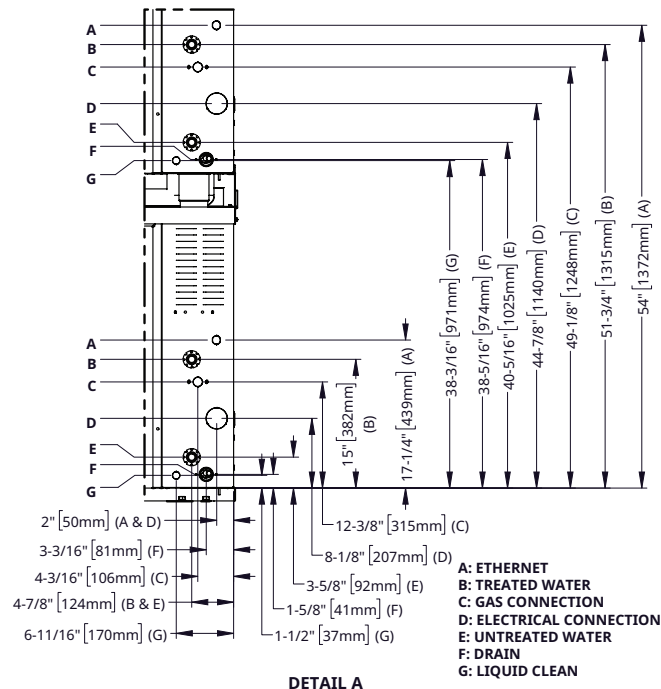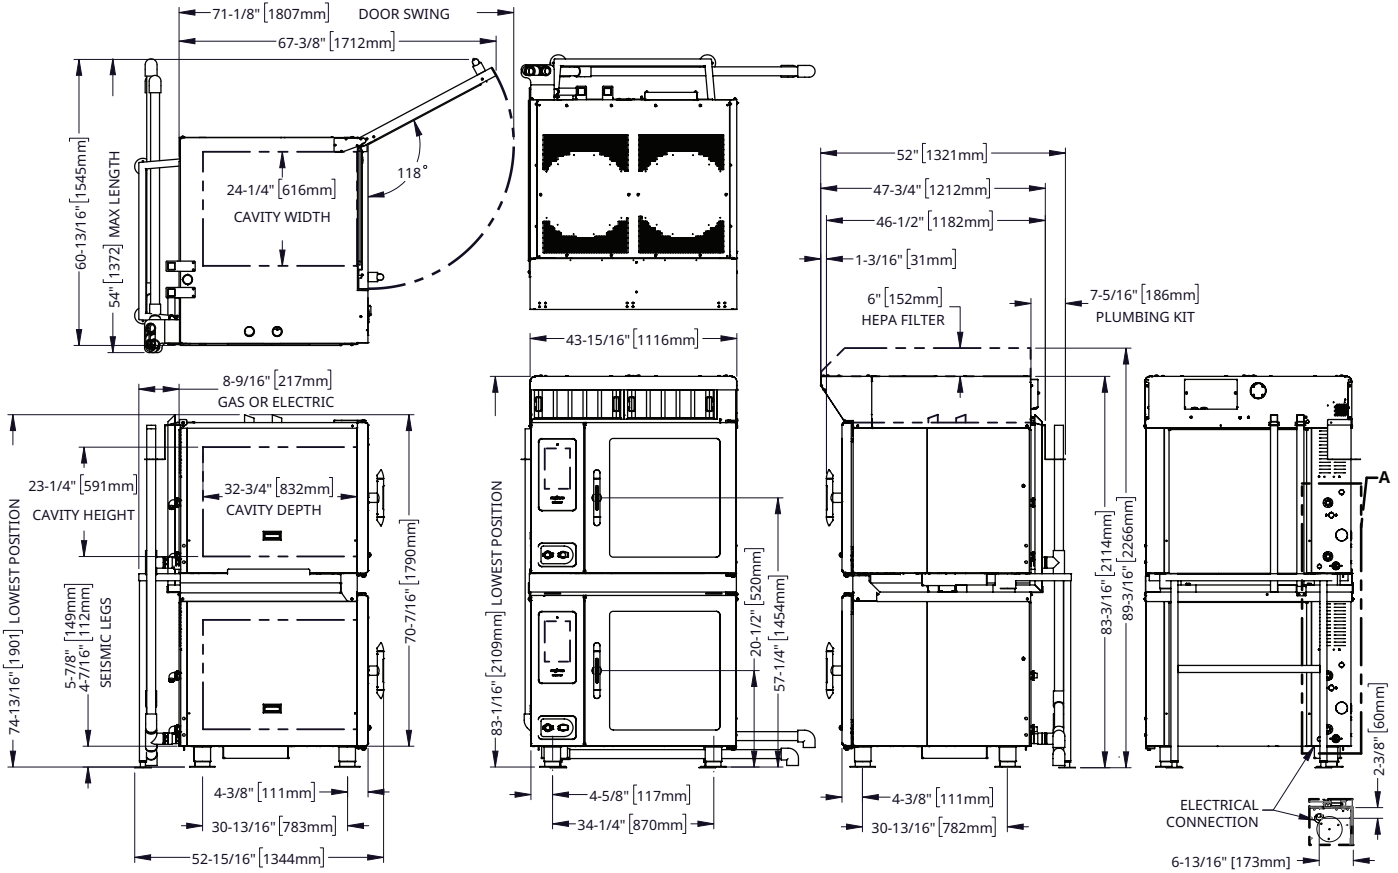

Model 7-20/7-20

Exterior (H x W x D)

74-13/16" x 43-15/16" x 47-3/4" [1901mm x 1116mm x 1212mm]

Net Weight

1138 lb [516 kg]

Ship Dimensions (L x W x H)*

53" x 53" x 87" [1346mm x 1346mm x 2210mm]

Ship Weight

Call factory

*Domestic ground shipping information. Contact factory for export weight and dimensions.

Prodigi™ Pro 7-20/7-20 Stacked (E/G)



7-20E ELECTRIC

Per oven

7-20E	V	Ph	Hz	ECO						Turbo Option*						
				AWG**	A	A^	Breaker minimum	kW	kW^	AWG**	A	A^	Breaker minimum	kW	kW^	Connection
208-240V	208	3	50/60	6	45.7	46.4	58A/58A^	16.4	16.7	4	53.4	54.2	67A/68A^	19.2	19.5	3Ø/PE
	240	3	50/60	6	52.7	53.9	66A/68A^	21.9	22.4	4	61.4	62.7	77A/79A^	25.5	26.0	3Ø/PE
440-480V	440	3	50/60	12	20.6	21.0	26A/27A^	15.7	16.0	10	24.7	25.9	31A/33A^	18.3	19.7	3Ø/PE
	480	3	50/60	12	22.4	23.1	28A/29A^	18.7	19.2	10	26.2	28.5	33A/36A^	21.8	23.7	3Ø/PE

*No-cost option on electric models.

^Values for units with Ventech Hoods.

** Recommended minimum conductor sized at 90°C and ambient 30°C.

- Electrical connections must meet all applicable federal, state, and local codes.
- For use on individual branch circuit only.
- Ovens are not supplied with an electrical cord or plug.
- Electric supply may be hard-wired or use a cord and plug. Local codes may require a current protection device. If so, the device must accommodate a leakage current of 20mA.

With Smoker Option				ECO				Turbo Option*				
7-20E	V	Ph	Hz	AWG**	A	Breaker minimum	kW	AWG**	A	Breaker minimum	kW	Connection
208-240V	208	3	50/60	6	47.2	59A	17.0	4	54.7	69A	19.7	3Ø/PE
	240	3	50/60	6	54.4	68A	22.6	4	63.1	79A	26.2	3Ø/PE
440-480V	440	3	50/60	12	21.9	28A	16.2	10	24.7	31A	18.8	3Ø/PE
	480	3	50/60	12	23.8	30A	19.2	10	26.8	34A	22.3	3Ø/PE

*No-cost option on electric models.

** Recommended minimum conductor sized at 90°C and ambient 30°C.

- Electrical connections must meet all applicable federal, state, and local codes.
- For use on individual branch circuit only.
- Ovens are not supplied with an electrical cord or plug.
- Electric supply may be hard-wired or use a cord and plug. Local codes may require a current protection device. If so, the device must accommodate a leakage current of 20mA.

Per oven



7-20G ELECTRIC

7-20G	V	Ph	Hz	AWG**	Without Smoker Option			With Smoker Option			Connection
					A	Breaker minimum	kW	A	Breaker minimum	kW	
120 V	120	1	60	12	6,8	20A	0,84	12,0	20A	1,5	1Ø/PE
208-240 V	208	1	50/60	14	4,8	15A	1,0	7,3	15A	1,5	1Ø/PE
	240	1	50/60	14	4,2	15A	1,0	7,1	15A	1,7	1Ø/PE
208-240 V	208	3	50/60	14	4,8	15A	1,0	7,3	15A	1,5	3Ø/PE
	240	3	50/60	14	4,2	15A	1,0	7,1	15A	1,7	3Ø/PE

** Recommended minimum conductor sized at 90°C and ambient 30°C.

- Electrical connections must meet all applicable federal, state, and local codes.
- For use on individual branch circuit only.
- Ovens are not supplied with an electrical cord or plug.
- Electric supply must be hard-wired. Local codes may require a current protection device. If so, the device must accommodate a leakage current of 20mA.

OVENS WITH VENTECH® HOOD

Electric only

Eliminate the need for a traditional kitchen hood. Ventech Type 1 hoods with condensation technology condense steam while capturing and removing grease-laden air, vapors, and lingering smoke. For more demanding locations, Ventech PLUS™ hoods include a HEPA filter. These hoods combine the fine particulate filtering of a HEPA filter with condensation technology of the standard Ventech hood.



Prodigi™ Pro 7-20/7-20 Stacked (E/G)



CLEARANCE

- Top: 20" [508mm]
- Left: 0" [0mm]
- Right: 18" [457mm] recommended service access
- Bottom: 5-1/8" [130mm]
- Back: 4" [102mm] between plumbing and nearest object



REQUIREMENTS

- Oven must be installed level.
- Oven must be installed on noncombustible surface.
- Use a water supply shut-off valve and back-flow preventer when required by local code.
- Drain must not be located directly underneath the appliance.



HEAT: ELECTRIC

Per oven

Heat of rejection

7-20E	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	1305	0.38



NOISE: ELECTRIC

Per oven

Noise emissions

Without hood system, a maximum 67 dBA was measured at 3.3 ft [1 m] from unit.

With hood system, a maximum 73 dBA was measured at 3.3 ft [1 m] from unit.



HEAT: GAS

Per oven

Heat of rejection

7-20G	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	549	0.16



NOISE: GAS

Per oven

Noise emissions

Without hood system, a maximum 67 dBA was measured at 3.3 ft [1 m] from unit.



GAS REQUIREMENTS

- Gas Requirements
- Gas type must be specified on order
 - Hook-up: 3/4" NPT

Per oven

UL Marked Appliances	Maximum Input BTU/h	Maximum Inlet Pressure Inches WC [kPa]	Minimum Inlet Pressure Inches WC [kPa]	Maximum Fuel Consumption*	
				CFH	GPH
Natural Gas	98,000	14.0 [3.5]	5.5 [1.1]	93.3	N/A
Propane	98,000	14.0 [3.5]	9.2 [2.8]	39.2	1.1

*Assumes an average heating value for natural gas to be 1050 BTU/SCF and a specific gravity of 0.60. The assumed value for propane gas is 2,500 BTU/SCF, and a specific gravity of 1.53.



WATER

Water requirements (per oven)

Two cold water inlets — drinking quality

- One treated water inlet: 3/4" NPT male connection. Line pressure 30 psi minimum dynamic and 90 psi maximum static [200–1000 kPa] at a minimum flow rate of 0.26 gpm [1 L/min].
- One untreated water inlet: 3/4" NPT male connection. Line pressure 30 psi minimum dynamic and 90 psi maximum static [200–1000 kPa] at a minimum flow rate of 2.64 gpm [10 L/min]. Water drain: 1-1/2" [40mm] connection with a vertical vent to extend above the exhaust vent. Materials must withstand temperatures up to 200°F [93°C].

Water Quality Standards

It is the sole responsibility of the owner/operator/purchaser of this equipment to verify that the incoming water supply is comprehensively tested and, if required, a means of "water treatment" provided that would meet compliance requirements with the published water quality standards shown below. Non-compliance with these minimum standards will potentially damage this equipment and/or components and void the original equipment manufacturer's warranty. Alto-Shaam recommends using the Alto-Shaam Reverse Osmosis System or a water filtration system to properly treat your water.

Inlet Water Requirements		
Contaminant	Treated Water	Untreated Water
Free Chlorine	Less than 0.1 ppm [mg/L]	Less than 0.1 ppm [mg/L]
Hardness	30-70 ppm	30-70 ppm
Chloride	Less than 30 ppm [mg/L]	Less than 30 ppm [mg/L]
pH	7.0 to 8.5	7.0 to 8.5
Silica	Less than 12 ppm [mg/L]	Less than 12 ppm [mg/L]
Total Dissolved Solids [tds]	50-125 ppm	50-360 ppm



CLEARANCE

Clearance requirements for water filtration system

Do not install a water filtration system behind unit.

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com