

## SIX HOB



### PERFORMANCE


The CookTek® Six Hob features six independent induction cook zones for precise, efficient heating of any induction-compatible pan. Its built-in redundancy ensures uninterrupted performance, allowing each zone to operate independently. Designed for back-of-the-house applications, it includes a high-impact glass-ceramic cooktop, an automatic shut-off feature, integral cooling fans, and a self-diagnosing microprocessor for a safer and more reliable kitchen environment.

### FEATURES

- Six independently controlled induction cook zones
- 21,000 watts (3,500/hob)
- Built-in redundancy to ensure uninterrupted performance even if one hob requires maintenance
- Over 90% energy efficient—outperforms gas and electric burners
- Seamlessly drops into a stainless-steel cart base with built-in storage
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic cooktop with four separate induction cook zones
- Automatic pan detection allows for instant energy transmission to pan
- LED bar graph displays
- Rotary knobs with 0–10 power settings
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffles ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fans to keep internal components cool
- Hardwired design for a seamless, reliable power connection – no cords or plugs required
- One-year warranty on parts and labor

\*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

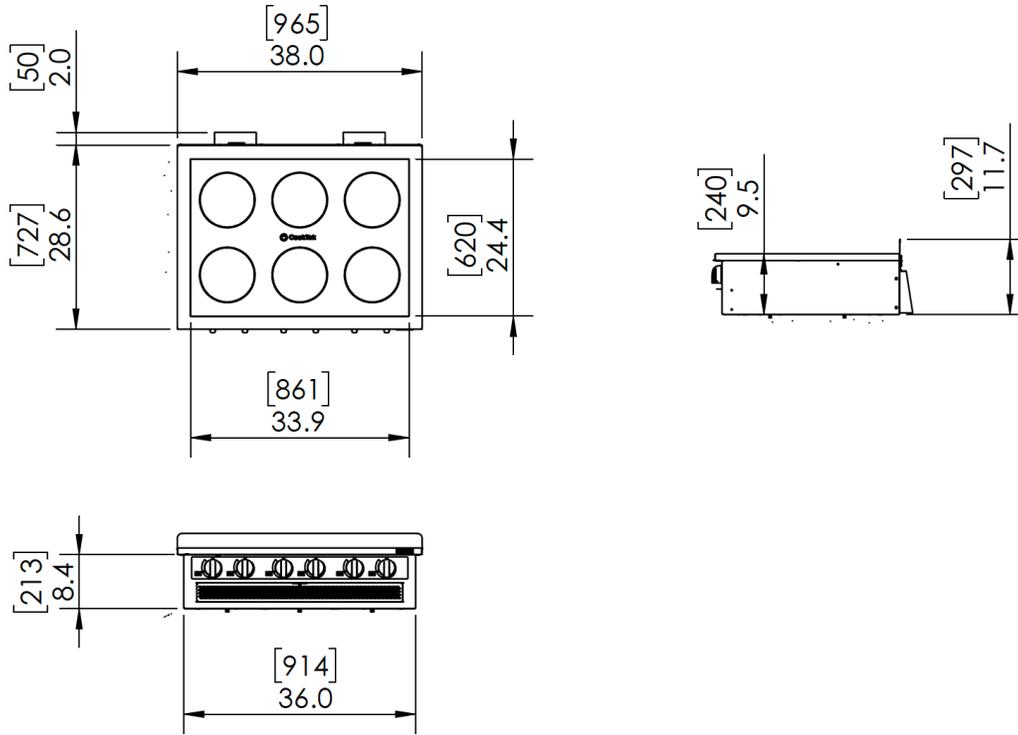

DIMENSIONS		
Full Unit Height	11.7"	297 mm
Full Unit Width	38"	965 mm
Full Unit Depth	28.6"	727 mm
Weight	149 lb.	67.6 kg
Cooking Surface Width	33.9"	861 mm
Cooking Surface Depth	24.4"	620 mm
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE		
Front	2"	50 mm
Sides	2"	50 mm
Rear	2"	50 mm

ELECTRICAL SPECIFICATIONS (SINGLE PHASE)	
UNITED STATES/CANADA	
VIC-9600-1	200-240V, 3500W/hob, 3 Phase, 58.3A, Hardwired
INTERNATIONAL	
VIC-9600-2	200-240V, 3500W/hob, 3 Phase, 58.3A, Hardwired

SHIPPING INFORMATION		
Packaged Height	20"	508 mm
Packaged Width	43"	1092 mm
Packaged Depth	39"	991 mm
Packaged Weight	290 lb.	131.5 kg
Item Class	250 NMFC #26710	