


## CORRUGATED SIDEWALL UTILITY RACK 200 SERIES

### FEATURES AND BENEFITS:

- Durable utility rack for transport and storage of products on 18" x 26" pans.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Corrugated sidewalls securely hold 18" x 26" pans on 1-1/2" centers without tipping. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing. Eliminates potential of product damage.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

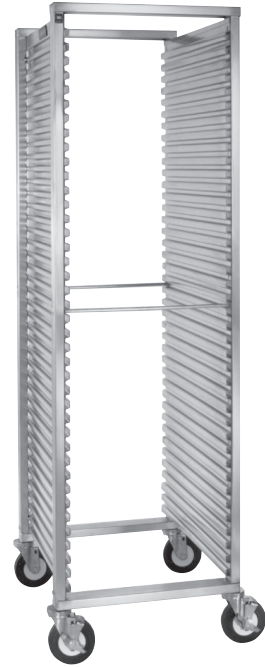

200-1841A




### ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.



# 200 Series

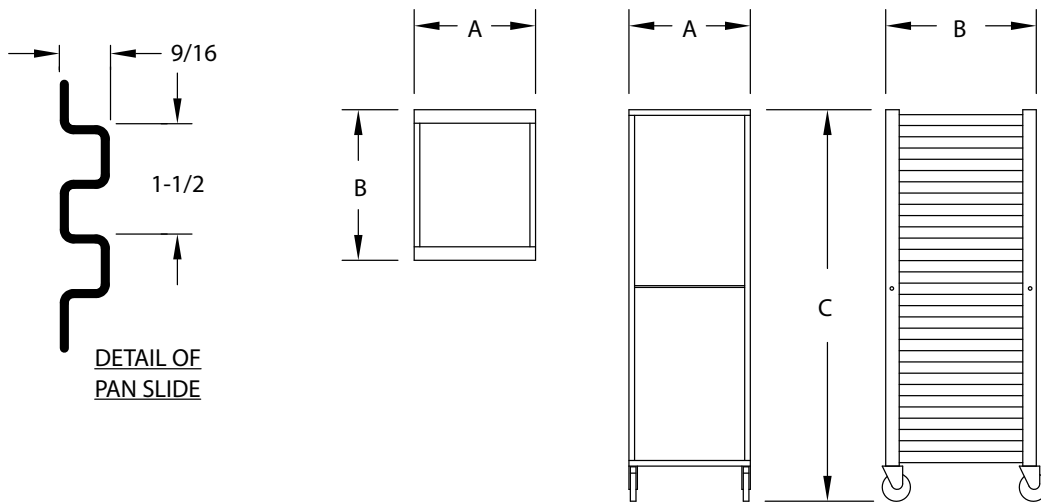

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
200-1841A	39	18 X 26	IN	21-13/16	26-3/4	69-9/16	18-1/16	26	61-3/8	LBS	66
		460 X 660	MM	555	680	1770	460	660	1555	KG	30
200-1833A	31	18 x 26	IN	21-13/16	26-3/4	57-9/16	18-1/16	26	49-3/8	LBS	55
		460 x 660	MM	555	680	1465	460	660	1250	KG	25

NOTES: 1. Send sample pan or tray with order when using any that are not 18" x 26" pans with heavy beaded edges.  
2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.



Gold indicates our Best Rack with the best warranty in the industry. 3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

## RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 3/8 dia. rods; welded to posts.
- Sides: .063 aluminum corrugations riveted to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

## PAN SLIDES:

- Corrugations act as pan slides on 1-1/2" centers.

### SHORT FORM SPECIFICATIONS

Cres Cor Utility Rack Model 200-\_\_\_\_. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. No-tip corrugated sides for ( \_\_ ) 18" x 26" pans on 1-1/2" centers. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: \_\_\_\_ \_\_\_\_ \_\_\_\_\_. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.