

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

# Glass Half Door Heated Cabinet

Reach-In PRO Series

Model: PRO-77-6H-G

## \_\_\_ FEATURES & BENEFITS =\_\_

## ■ Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- · Alarm beeps when doors are not sealed
- Early warning alarm program detects issues before malfunctionoccurs
- · Digital display allows for easy monitoring
- · Sensitive touch display

## ■ Ducted fan air distribution system

Maintains temperature within the food zone

#### On/Off switch

ON/OFF switch is located on control panel

#### All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

#### Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

### ■ LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Half length glass doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles











Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D*x H † (inches)
PRO-77-6H-G	6	73.9	9	3000	15	816	773/4 x 337/8 x 78

# Model: PRO-77-6H-G

ELECTRICAL DATA				
Voltage	208~230V/115V/60Hz/1Ph			
Plug Type	NEMA L14-20P			
Full Load Amperes	15			
Wattage (W)	3000			
Cord Length (ft.)	8			
DIMENSIONAL DATA				
# of Doors	6			
# of Racks Accepted	3			
Net Capacity (cu. ft.)	73.9			
Ext. Length Overall (in.)	773/4 (1976mm)			
Ext. Depth Overall (in.)*	337/8 (860mm)			
Ext. Height Overall (in.)†	78 (1982mm)			
Int. Length Overall (in.)	68 <sub>1/4</sub> (1735mm)			
Int. Depth Overall (in.)	275/8 (702mm)			
Int. Height Overall (in.)	58 <sub>3/4</sub> (1493mm)			
# of Shelves	9			
Chalf Ciza (L x D) (in )	223/4 x 263/8 (Left/Right)			
Shelf Size (L x D) (in.)	25 x 263/8 (Middle)			
Net Weight (lbs.)	748			
Gross Weight (lbs.)	816			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

## ■ WARRANTY: 3 Year Parts and Labor Warranty


#### STANDARD FEATURES


- Door locks
- · 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- · Solid and sturdy grille design

#### OPTIONAL ACCESSORIES

- 5" caster. 1/2" diameter & 13 TPI:
- M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4), TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF, TS3-N1C(#1), TS3-N1C HALF, TS3-N4C(#4), TS3-N4C HALF, TS3-UNC-H(Universal), TS3-UNC-H HALF

#### **PLAN VIEW** (unit: inch)



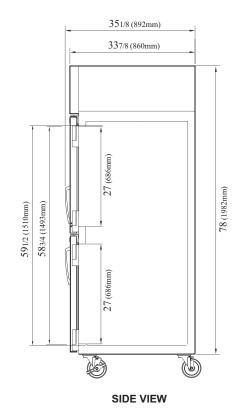

Ver.20230608



















■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519 ■ Warranty: 800-381-7770 ■ AC: 888-900-1002

<sup>\*</sup> Depth does not include 1-1/4" for door handles.

<sup>†</sup> Height does not include 5" for caster height.