



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: VBR12N *Curved Display Cases, Dry*



VBR12N



Rear Sliding Doors, with stay open feature

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Modular Line.** Designed for pastry, Viennese breads and bakery.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Increases product visibility considerably.

MODEL	Dimensions (inches) (mm)			Nº Doors	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H								
VBR 12 R	50-3/4 1290	31-7/8 810	51-1/8 1300	2	-	-	-	13 365	-	0.5	547 248

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
3325 N.W. 70th Avenue
Miami, FL 33122-1332
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
operations@infrico.com
service@infrico.com
sales@infrico.com

APPROVALS: AVAILABLE AT:

Revision: 01 Date: 03/06/2014



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: VBR12N *Curved Display Cases, Dry*

STANDARD FEATURES

➤ **Exterior**

- Wooden sides and decoration.
- AISI 304 Stainless Steel top sill.
- Curved front with double glass panel.
- Decoration standard: White.

➤ **Interior**

- AISI 304 Stainless Steel.
- Glass shelves built into silver anodized aluminium frames.
- LED Lighting in canopy and under each self.


➤ **Insulation**

- High density CFC free Polyurethane foam.

➤ **Doors**

- (2) sliding rear doors.

➤ **Electrical**

- Cord and NEMA 5-15P plug. 
- Electrical connection is 115V / 1ph / 60 Hz.


➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

OPTIONAL FEATURES


- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).
- ✓ Decoration: Red / Blue / Orange / Green / Blue clear.

PLAN VIEW


ELEVATION

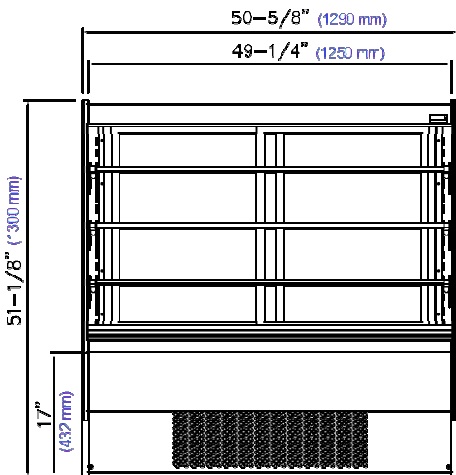

RIGHT VIEW

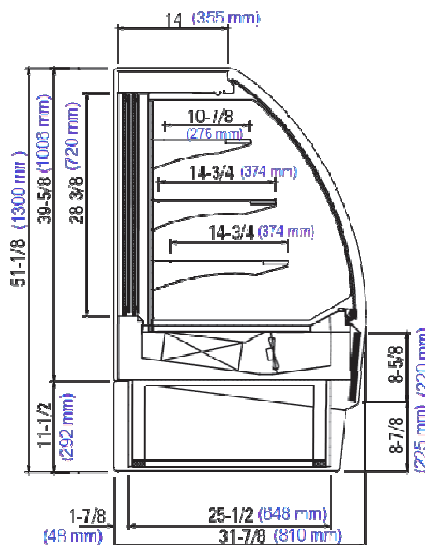

PLAN VIEW

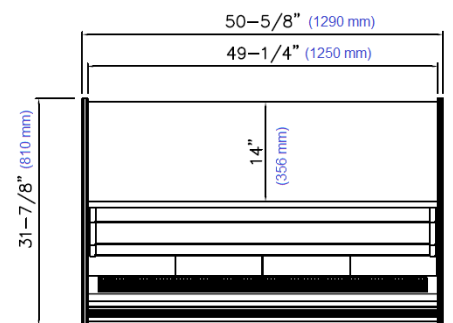

Revision: 01 Date: 03/06/2014

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico USA Corp.
 3325 N.W. 70th Avenue
 Miami, FL 33122-1332
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
 operations@infrico.com
 service@infrico.com
 sales@infrico.com

APPROVALS: AVAILABLE AT: