



PROOFER1



Proofer Cabinet, Roll-In, One-Cavity, Single (1) Rack Capacity or (36) 18"x26" Sheet Pans, Solid State Heat & Humidity Controls, Auto Water Entry, Full View Glass Door, Stainless Steel Interior and Exterior, Aluminum Floor, NSF, cETLus, ETL



PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **DRIP 1**



*rack not included

FEATURES

- Even Airflow Heating System Maintains the Right Combination of Heat and Humidity for Optimal Proofing
- Proofs from Room Temperature up to 110°F (43°C)
- Relative Humidity up to 95%
- Automatic Water Fill System (no water pans required)
- Manual Controls
- Independent Controls for Heat, Humidity and Timer

CONSTRUCTION

- Stainless Steel Construction
- Aluminum Flush Floor Entry
- Ships in One Piece
- Available with Left or Right Hinge Door

CLEARANCES

Minimum Clearance from Combustible Materials:

- 4" (102mm) Sides & Back
- 24" (609mm) Top

OPTIONS & ACCESSORIES

- Stainless Steel Door (suffix SD)
- Door Bumpers (suffix DB)
- Prison Package (suffix PPE)
- Water Filter (PLF240) (recommended)


WARRANTY

- One Year Labor & Two Year Parts



Model	Crated Weight	Overall Dimensions				Single Rack Capacity	Door Opening	
		W	D	H	A (Interior Depth)		B	C
DRIP1	400 (182)	32-13/16" (833)	46-1/2" (1181)	85-11/16" (2176)	32-5/8" (829)	1	25" (635)	73-7/8" (1876)

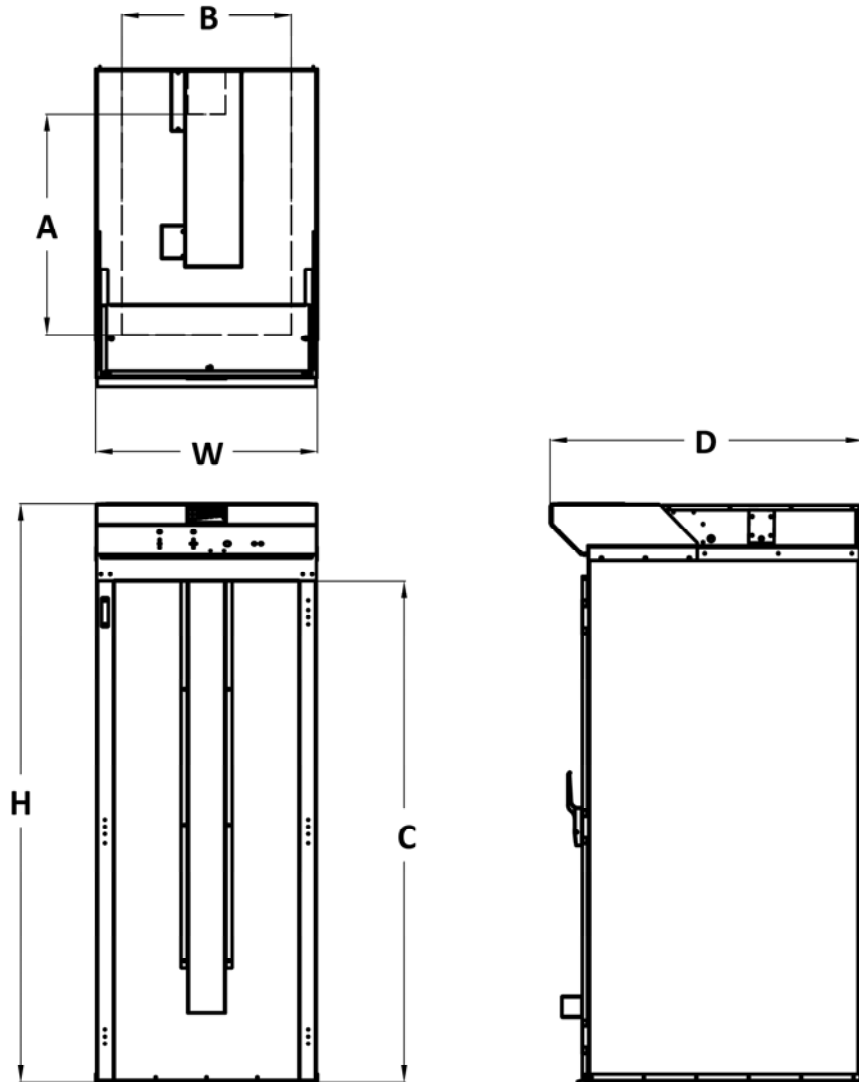

DRAWINGS


Model	Water Inlet	Electrical System			
		Volts	Phases	Amps	kW
DRIP1	1/4" (6)	120	1	39	4.7
		120/208		28	5.7
		120/240		24	5.7

