

High capacity, small footprint

MCC Hot self serve humidified
with glass doors
4 levels



The Modular Convenience Counters MCC offer you the best, in every aspect



High Capacity

Highest capacity on a small footprint: Up to 30%* more display surface



Total Visibility

Up to 75%* more product visibility due to transparent sides, top and shelves



Best Performance

Maximum food safety, extended shelf life and less waste



Mix & Match

Unlimited possibilities and combinations with other hot & cold MCC's



Green Efficiency

Low total cost of ownership & environmental friendly green technologies

*Compared to competition according to global ISO standards - TDA ISO 23953

MCC Hot self serve with glass doors

- 4-level heated and humidified self serve display cabinet
- Designed for packaged and unpackaged products
- Self and soft closing glass doors on customer side
- 24, 36 or 48 inches wide
- Unlimited possibilities in combining hot and cold side-by-side
- Available as solid back, or with soft closing and sliding glass doors on operator side
- Available as floor model or as drop-in, adaptable to any store design
- Ready to plug in for quick and easy installation
- Underframe floor model available in any RAL colour
- Slim shelves with adjustable angle and height
- LED lighting with natural colour reproduction on each shelf
- Hot Blanket holding technology keeps products at $\geq 150^{\circ}\text{F}$
- Energy saving hot airflow recirculation technology
- Humidification with automatic or manual fill
- Thermo pane glass - increased insulation
- Point-of-sales price strips included
- Total presentation area:
 - MCC 24-4: 10.76 ft²
 - MCC 36-4: 17.22 ft²
 - MCC 48-4: 23.57 ft²
- Also available as
 - MCC Hot full serve humidified



Four presentation levels



Hot Blanket holding technology



Optimal visibility




Floor model or drop-in version


	MCC 24-4 Hot SS FD	MCC 36-4 Hot SS FD	MCC 48-4 Hot SS FD
Width	23 5/8"	35 7/16"	47 1/4"
Depth	29 1/2"	29 1/2"	29 1/2"
Height on stand	55 7/8"	55 7/8"	55 7/8"
Height drop-in above worktop	33 1/16"	33 1/16"	33 1/16"
Voltage	1~ 208	1~ 208	1~ 208
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Power	1.73 kW	2.10 kW	2.81 kW
Door width*	20 3/16"	15 1/4"	21 3/16"

* MCC 24: 1 door (left or right hinged), MCC 36: 2 doors, MCC 48: 2 doors


MCC Hot SS FD on stand Solid back

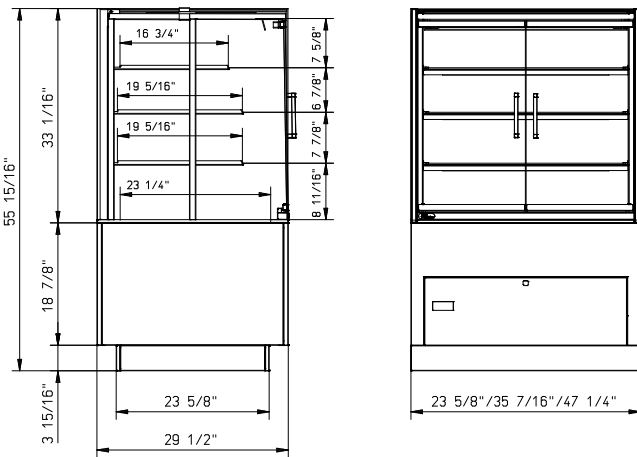


Pass-through

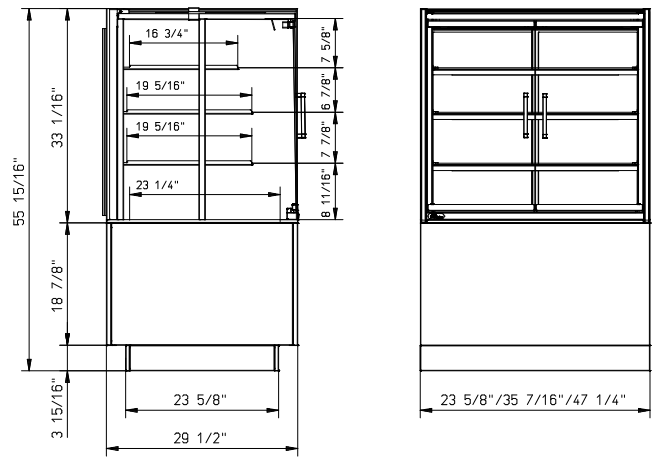

MCC Hot SS FD drop-in Solid back

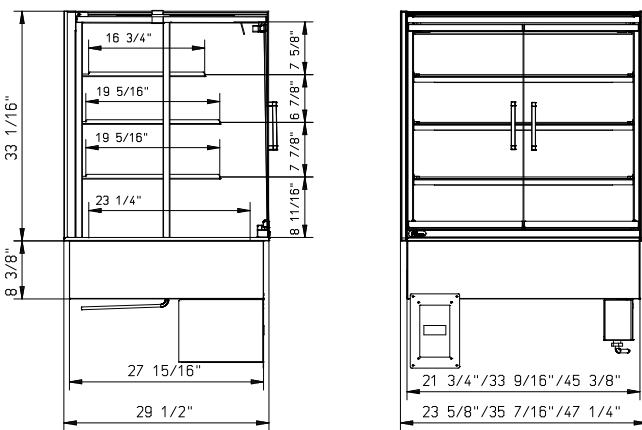

Pass-through

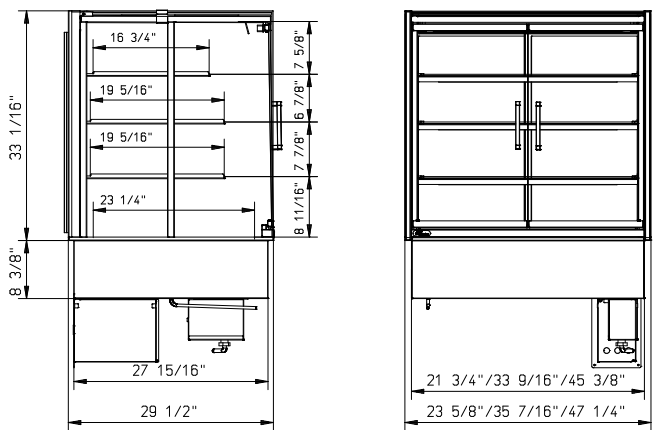

Specifications and technical data are subject to amendment without notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at www.frijado.com.



The MCC Hot is ETL listed (meets UL standard 197, NSF standard 4 and CSA standard C22.2 No. 109).



Fri-Jado Inc.
1401 Davey Road
Suite 100
Woodridge IL 60517
Toll free 877-374-5236
e-mail us.info@frijado.com
www.frijado.com