REFRIGERATOR



Project:	AIA#
Item:	
Location:	SIS#
Approved:	

WORKTOP SIDE MOUNT REFRIGERATOR

WTRD119AHC Solid Door Worktop Refrigerator With Drawers Hydrocarbon Series





CABINET CONSTRUCTION

- Stainless steel front, sides, door and drawers (galvanized back &
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- 16 Gauge stainless steel top
- Full electronic control
- Interior thermometer is standard
- 4" Foamed-in-place backsplash
- Snap-in drawer gaskets
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket attached to each door for positive seal
- Field-reversible doors
- Two (2) epoxy-coated steel wire shelves
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- · Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (solid doors only)
- Bun rack
- Wire shelf divider
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Flat-top with no backsplash (-FLT)
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	WTRD119AHC-6	
EXTERNAL DIMENSIONAL DATA		
Width Overall	118 1/8"	
Depth Overall with Handles & Bumper	35 ¾"	
Height Overall with 6" Casters	39 ½"	
Number of Drawers	6	
Drawer Openings	21 5/8" x 10 3/8" 21 5/8" x 10 1/4"	
Depth with Drawer Extended	57 ½"	
Number of Doors	1	
Depth of Door Open 90°	55 1⁄4"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	40.12	
Internal Width Overall (in)	114 1/8"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	25"	
No. of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	5.0	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2629	
Heat Rejection (BTU/Hr)	3943.5	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9	
SHIPPING DATA		
Gross Weight - Crated	750 lbs	
Height - Crated	48"	
Width - Crated	122"	
Depth - Crated	37"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).














Worktop Refrigerator - Side Mount Model: WTRD119AHC-6

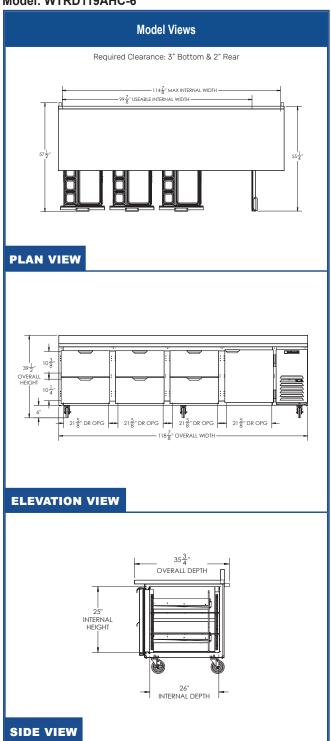

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord

