

## HOTCUBE<sup>1</sup>™ INSULATED OUTDOOR HOT CABINET MODEL HC1-UA-11 (PATENT PENDING)

### ADDITIONAL FEATURES AND BENEFITS:

- Industry's first line of propane heated hot cabinets allowing you to hold food safely **outdoors**\*.
- Fully insulated holding cabinet keeps prepared foods at proper serving temperatures easily.
- Powerful, yet efficient, proprietary propane heating system maintains the right temperature to properly hold foods utilizing 8700 BTU's of heat. Safely hold up to 200°F (93°C).
- Ample capacity to hold up to 22 steam table pans or 11 sheet pans.
- Utilizes standard 1 lb. propane tanks for up to 8 hours of hold time. Also approved for 20 lb. tank use for longer hold periods.
- Heavy duty 8" pneumatic swivel casters, two with brakes. Rear casters are fixed to provides mobility when fully loaded, and stability during transport even in tough outdoor conditions.
- Easy visual sight glass to see propane flame.
- Piezo ignition system.
- Available body and rail custom colors or add a vinyl or magnetic door with your logo!
- Eleven sets of locking transport angles accommodate a variety of pan sizes on adjustable 1-1/2" centers. Provides capacity for up to (22) 12 x 20 steam table pans.

**HotCube<sup>1</sup>**

HC1-UA-11




### ACCESSORIES and OPTIONS (Available at extra cost):

- 20 lb. Hose Adapter
- Door Window
- Customized Logos/Powder Coating
- Fitted Drip Tray
- 6" Hi-Modulus Casters

See page B-20 for accessory details.

# HC1-UA-11

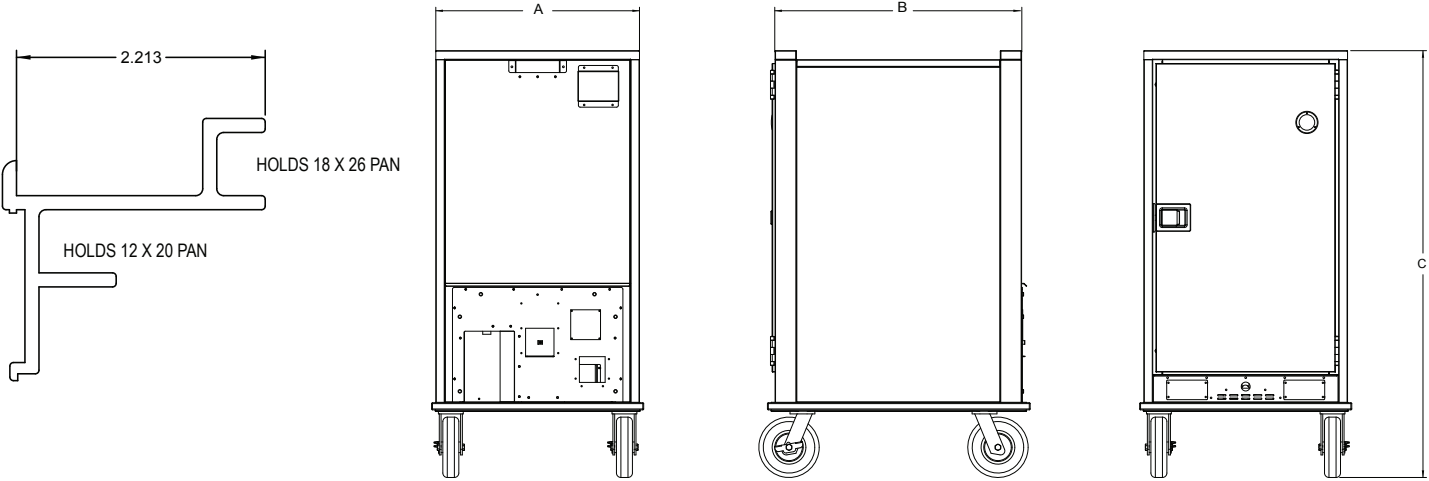

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
HC1-UA-11	11 SETS	SEE NOTE BELOW	IN	28-3/4	37	60-1/8	22	27	42	LBS	408
			MM	730	940	1527	560	690	1070	KG	185

NOTE: Pan sizes 18" x 26" (460 x 660) Bun Pans, 12" x 20" (305 x 510) Steam Table Pans.

**CABINET:**

- Inner body: 20 ga. stainless steel.
- Outer body: .063 aluminum, powder coated red.
- Reinforcement: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in door, back, top and sidewalls.
- Push/pull handles (2) powder coated black.
- 1-1/4" Sight glass for flame detection.

**BASE:**

- One piece construction, .060 stainless steel.
- Casters: 8" dia., (2) swivel (2) fixed, never flat, load cap. 310 lbs. each, Double ball bearings. Front casters equipped with brakes.

**DOOR:**

- Formed 22 ga. stainless steel.
- Latches: Polished stainless steel, slam type; mounted inboard.
- Gasket: Perimeter type.
- Thermometer: Analog.

**TRANSPORT PAN SLIDES:**

- Extruded aluminum; mounted on locking lift-off posts.
- Spaced on 3" centers; adjustable on 1-1/2" centers.

**HOT UNIT COMPONENTS:**

- Propane powered heating system.
- Burner: 8700 BTU's
- Thermostat: 140°F to 200°F.

**SHORT FORM SPECIFICATIONS**

Cres Cor Insulated Hot Cabinet Model HC1-UA-11 outer of .063 aluminum, stainless steel internal frame. (11) sets locking transport angles for multiple pan sizes, adjustable spacing every 1-1/2". Inner body stainless steel. Fiberglass insulation in sides; doors, back, top, and sidewalls 1-1/2". Interior coved corners. Hose out cleaning capability. One piece base, stainless steel. 8" swivel pneumatic casters, Double ball bearings, two with brakes. Load capacity 310 lbs. each. 2 year parts warranty. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_.

CSA-US, CSA-C listed, CSA Sanitation, CSA Gas Canada and CSA design certified US.