



# IM-0750 Ice Cube Machine

## Models

- IM-0750-AC     IM-0750-AH



ICETRO IM-0750 ice machine on a IB-044 bin

\*Ice Machine and Bin sold separately

- Up to 737 lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Sides & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- R-404A refrigerant

## Ice Shape



**Half Cube**  
 $\frac{3}{8}'' \times 1\frac{1}{8}'' \times \frac{7}{8}''$   
 (.95 x 2.86 x 2.22 cm)



**Cube**  
 $\frac{7}{8}'' \times \frac{7}{8}'' \times \frac{7}{8}''$   
 (2.22 x 2.22 x 2.22 cm)

## Factory Warranty

<b>Parts &amp; Labor</b>	<b>Parts</b>	<b>Parts</b>
<b>3</b> YR	<b>5</b> YR	<b>5</b> YR
Ice Maker	Evaporator	Compressor



Extend ice machine warranty 1 year by installing an IcePro 800 with ice machine.

\* Applies only to new ice machines, at the time of original installation & start-up.

## Specifications

### BTU Per Hour:

14,558

### Refrigerant:

R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

## Ice Machine Electric

208-230/60/1

### Minimum circuit ampacity:

Air-cooled: 15 *1ph*

### Maximum fuse size:

Air-cooled: 25 *1ph*

## Accessories

**Bin Adapter**  
**IBT-3048B**  
 Center Mount  
 48" Bin



**Bin-Stat Kit**  
**IBO-150KIT**

Recommended when ice machine is installed on soda dispenser.



**Water Filtration**


**IcePro 800**  
 Reduces sediment and chlorine contaminants with the use of Citrine.






# IM-0750 Ice Cube Machine


## IM-0750 Air Cooled

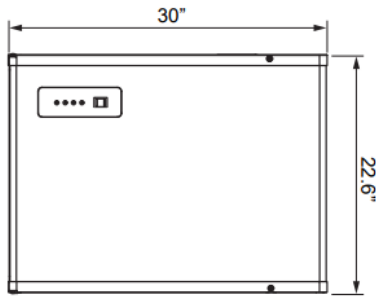

FRONT VIEW



SIDE VIEW

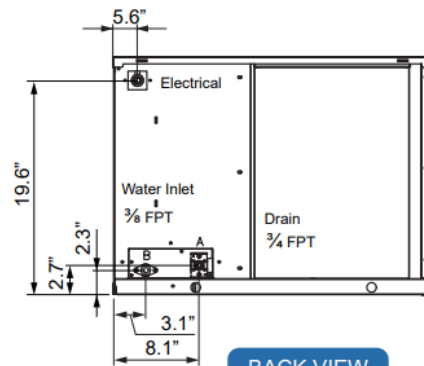

BACK VIEW

## Specifications

Dimensions	Width	Depth	Height	Weight
IM-0750 Machine	30"	24.8"	22.6"	185.2 lbs(Net) 218lbs(Shipping)

Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
		70°Air/ 50°F Water	90°Air/ 70°F Water		
AIR COOLED	cube	1 ph	1 ph	1 Ph	15 Gal.
		737lbs 434kgs	672 lbs 305 kgs	5.59	15 Gal.
	half-cube	737lbs	672 lbs	5.59	15 Gal.
		434kgs	305 kgs	15 Gal.	

