



Model: DX-109 Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

8" Center Wall Mount Pre-Rinse with Add-On Faucet w/ 12" Spout

DIAMOND
series



Description

- 8" Center Wall Mount Pre Rinse with Add-On Faucet w/ 12" Swing Spout, Ultra-Polish Satin Finish, 1.15 GPM Dual Spray Head Valve and 1.8 GPM Female Aerator Installed on Spout

Standard Features


- 1/4 turn stainless steel high performance ceramic cartridge valves with built-in check valves
- Heavy Duty Flanges with eccentric fittings and innovative flange seal
- Dual Spray Technology, 1.15 GPM Knife & Cyclone Options
- Lever Handles
- Adjustable Wall Bracket & mounting kit included
- E-Z install flexible water line kit included
- Lifetime Warranty

Specifications

| | |
|----------------------|--|
| Water Inlet | 1/2" NPT Female |
| Temp. Range | 40°F - 180°F |
| Pressure | 20-120 PSI |
| Spray Head Flow Rate | 1.15 GPM |
| Faucet Flow Rate | 1.8 GPM |
| Body Material | Solid Brass with Ultra-Polish Satin Finish |
| Weight | 18 lbs. |
| Dimensions | 38" High 15" Overhang |

Product Compliance

- ASME A112.18.1/CSA B125.1
- NSF-61
- NSF/ANSI 372
- Meets ANSI A117.1 (ADA)

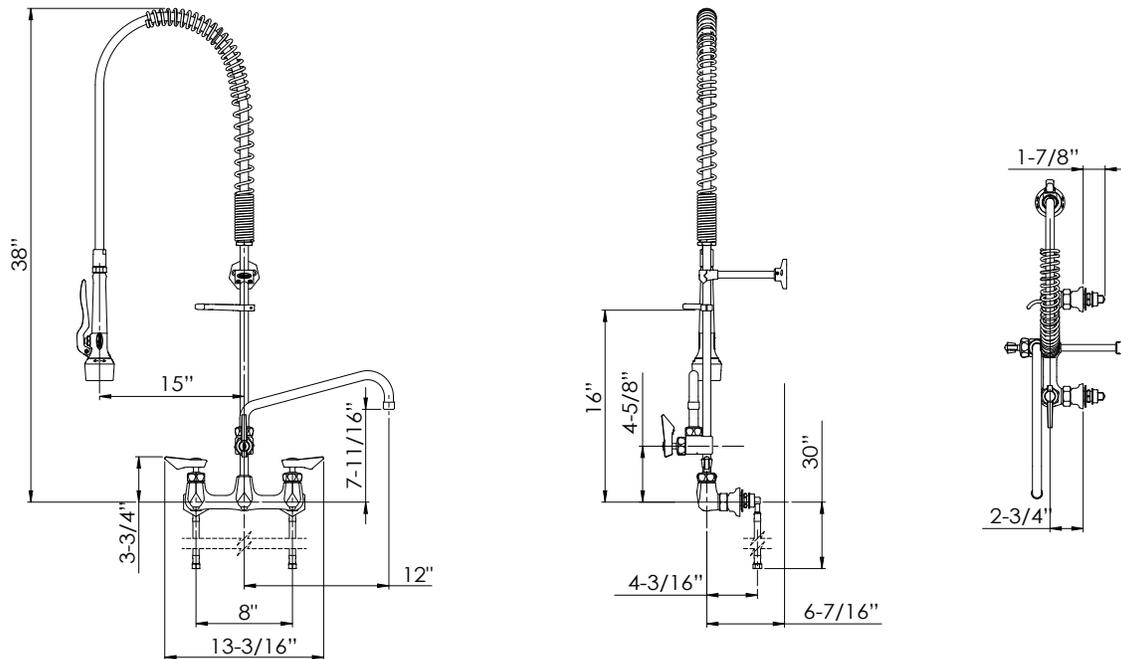

WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.
 California Proposition 65 Warning

Krowne Metal Corporation • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • customerservice@krowne.com • krowne.com

Due to our commitment to continued product improvement, specifications are subject to change without notice.


Rev. 1/2022 • No. DX-109



Model: **DX-109** Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

8" Center Wall Mount Pre-Rinse with Add-On Faucet w/ 12" Spout

DIAMOND
series

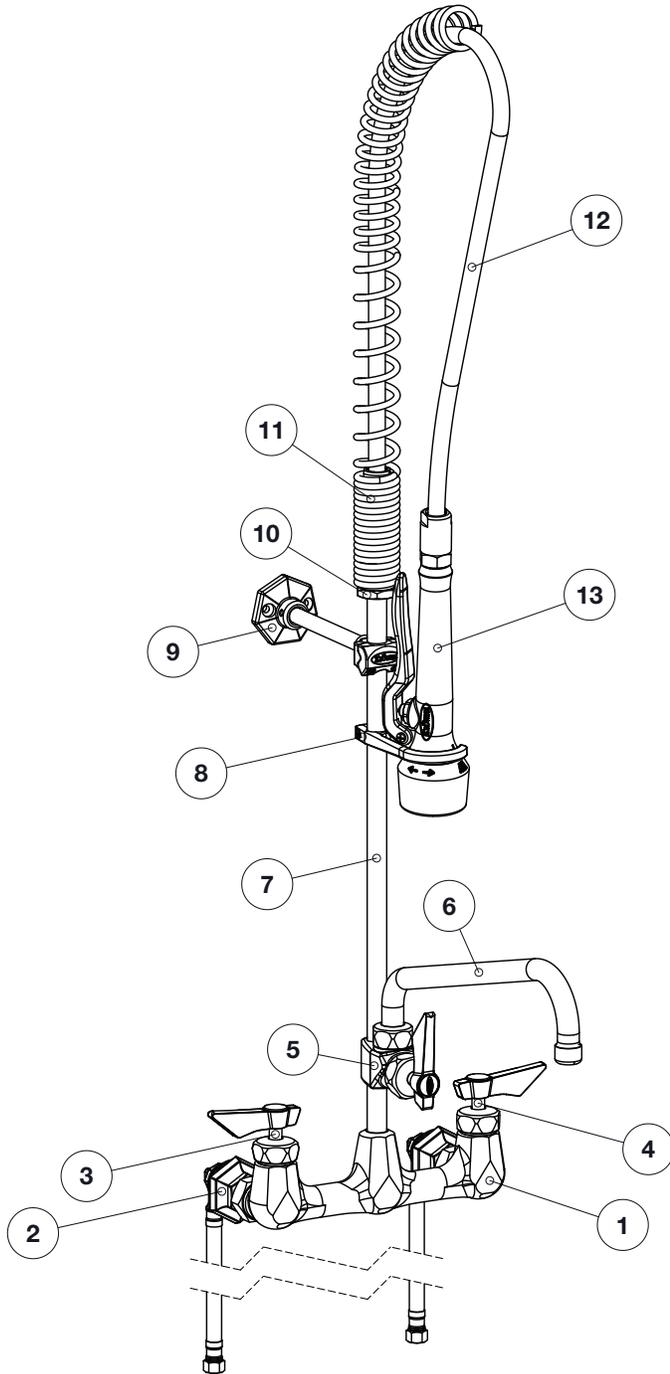

Replacement Parts

| No. | Model | Desc. |
|-----|-----------|---------------------------------------|
| 1 | DX-208 | 8" Center Wall Mount Pre-Rinse Base |
| 2 | DX-100 | (2) Coupling Flanges |
| 3 | DX-708 | Cold 1/4 Turn Ceramic Cartridge Valve |
| 4 | DX-709 | Hot 1/4 Turn Ceramic Cartridge Valve |
| 5 | DX-1XX | Add-On Faucet Base |
| 6 | DX-423 | 12" Swing Spout |
| 7 | DX-160-24 | 24" Riser Pipe |
| 8 | DX-165 | Hook/Screw Assembly |
| 9 | DX-137 | Wall Bracket |
| 10 | DX-161 | Spring Retainer |
| 11 | DX-162 | 24" Spring |
| 12 | DX-133 | 44" Pre-Rinse Hose |
| 13 | DX-129 | Spray Head (1.15 GPM) |

Spray Head Repair Parts

| Model | Desc. |
|--------|--|
| DX-166 | Repair Kit for Spray Head (Shower Pattern) |
| DX-171 | Spray Head Handle |
| DX-179 | Repair Kit for Spray Head (Knife Pattern) |
| DX-322 | Button Valve |

WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.
 California Proposition 65 Warning