

# Reach-in Refrigerator or Freezer

SOLID DOOR REFRIGERATOR  
SOLID DOOR FREEZER



Stainless Steel is ideal for your kitchen environment for many reasons which include sanitation, hygiene and is the workhorse for your Restaurant. Asber ARR series reach-ins features a **stainless-steel exterior front and sides** with an galvanized back. **Complete stainless-steel interior** for the most rugged construction while, easiest to clean with coved corner floors to meet **NSF standards**. Always one step above to ensure the highest standard in safety and sanitation for your establishment.

Insulation in any Refrigerator is one of the most important factors for thermal efficiency. Asber only uses the **world's leader Ecomate (GWP) (ODP) insulation, 2-3/8" thick** for the highest R value efficiency for your environments.

Operators come in many sizes; Asber Reach-ins come with an ergonomically designed **full-length door handle**. In-step interior for a better seal and prevent sweating. Magnetic one-piece door gasket, removable without tools for ease of cleaning and replacement. **Stainless Steel hinges** for a durable long-lasting door.

With innovative and eco-friendly technology, Asber utilizes **R-290 Hydrocarbon** designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).

Additional features to include:

- Hermetic compressors with epoxy coated evaporator
- Field reversible doors on solid single door units.
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- Electronic controller with digital display
- Refrigerator temperature: 32 °F to 38 °F, based on an external environment of 90 °F and 65% RH.
- Freezer temperature: -4 °F to -8 °F, based on an external environment of 90 °F and 65% RH.
- Standard with 5" castors, front with brakes.
- Meets the NSF-7 standard for food safety.



ARR-17

### OPTIONS & ACCESORIES

- Additional 2nd year warranty.
- 2.5" castors.
- Voltage: 220V. - 1 - 50Hz.
- Additional epoxy coated shelves.
- 6" adjustable stainless-steel legs.



MODEL	DOORS	SHELVES	CAPACITY (Cu. Ft.)	AMPS	HP	VOLTS	DIMENSIONS			SHIPPING WEIGHT (lbs)
							Width	Depth	Height	
REFRIGERATOR										
ARR-17	1	3	17	2.2	1/4	115/60	27"	26 7/8"	72 7/8"	240
FREEZER										
ARF-17	1	3	17	4.3	1/2	115/60	27"	26 7/8"	72 7/8"	260


1. Height does not include 4" diameter castors (5" overall) or 6" legs. Specifications are subject to change without prior notice.

# Reach-in Refrigerator or Freezer


SOLID DOOR REFRIGERATOR  
SOLID DOOR FREEZER




COMMON FRONT VIEW

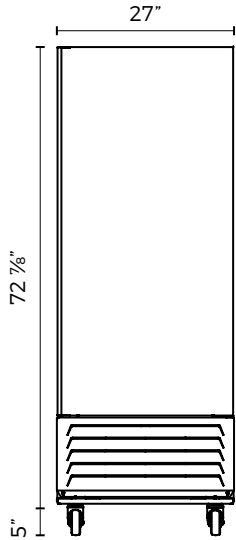

COMMON SIDE VIEW



COMMON TOP VIEW

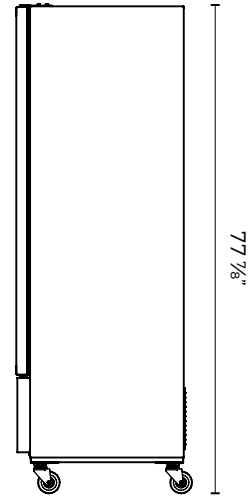

ARR-17 / ARF-17

ELECTRICAL DATA	Refrigerator	Freezer
Voltage	115/60	
Plug Type	Nema 5-15P	
Full Amp. Loads	2.2	4.3
Compressor HP	1/4	1/2
Cord Length (ft)	10	
Refrigerant	R-290	
DIMENSIONAL DATA		
# of Doors	1	
Capacity (cu. ft.)	17	
Ext. Width Overall	27"	
Ext. Depth Overall	26 7/8"	
Ext. Height Overall	72 7/8"	
Int. Width Overall	23"	
Int. Depth Overall	22 3/8"	
Int. Height Overall	49 5/8"	
# of Shelves - Std.	3	
Shelf Size (L x D)	22 1/2" x 18 5/8"	
Shipping Weight (lbs.)	240	260

## Standard Features

- Stainless steel Interior and Exterior (except rear).
- 2-3/8" Ecomate CFC Free foam in place insulation.
- Electronic controller with digital display.
- Self-contained Refrigeration with epoxy coated evaporator.
- Field reversible on solid single door units.
- One-piece magnetic door gasket, removable without tools.
- In step door design and full-length handle.

## Options & Accessories

- Additional 2<sup>nd</sup> year warranty.
- 2.5" castors.
- Voltage: 220V. - I - 50Hz.
- Additional epoxy coated shelves.
- 6" adjustable stainless-steel legs.

## Warranty

- 1-year parts & labor.
- 5-year compressor.

\*RESIDENTIAL APPLICATIONS: Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

1. Height does not include 4" diameter castors (5" overall) or 6" legs.