

COMMERCIAL

Refrigeration Equipment 1-Door Under Counter Freezer 27" Long 32" Tall



Short Form Specification

<u>ltem No.</u>

1-door freezer counter top, 32 inch tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. On-site reversible door feature for units with serial number 24020014 or later. External temperature display.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

| ITEM # | |
|---------|--|
| MODEL # | |
| NAME # | |
| SIS # | |
| AIA # | |

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- · Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- ADA Height Compliant

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

Optional Accessories


• 1 ADJUSTABLE FOOT


PNC 206445 🗅

APPROVAL:



Refrigeration Equipment 1-Door Under Counter Freezer 27" Long 32" Tall

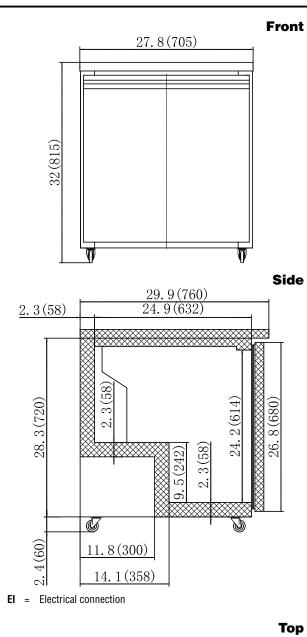



Intertek

Intertek

Electric

| Supply voltage: 738330 (KCHUC27F-32) Electrical power, max: Plug type: | 115 V/1 ph/60 Hz 0.16 kW USA NEMA 5-15P |
|--|---|
| Capacity: | |
| Gross capacity: Number and type of grids (included): | 6.5 cu.feet 1 - 570x425 |
| Key Information: | |
| Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material: Warranty: Approvals | Right Side 27 3/4" (705 mm) 29 15/16" (760 mm) 32 1/16" (815 mm) 1 Full 22 13/16" / (580 mm) 23 1/2" / (597 mm) 22 1/4" / (565 mm) 34 13/16" (885 mm) 161 lbs (73 kg) 18.62 ft ³ (0.53 m ³) Stainless Steel Polystyrene 3 / 5 years ETL C&USETL SANITATION |
| Refrigeration Data | |
| Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type: | 1/4 hp 32 °F 41 °F Fin & tube Auto Defrost |
| Sustainability | |
| Current consumption: Refrigerant type: Refrigerant weight: | 1.9 Amps R290 95 g |

Refrigeration Equipment 1-Door Under Counter Freezer 27" Long 32" Tall

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.