

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P SERIES TOP MOUNT ROLL-THRU FREEZER

PFT1HC Solid Door Freezer **Hydrocarbon Series**

MODEL: PFT1HC-1AS



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom)
- · Interior is made of corrosion resistant aluminum
- · Full electronic control
- · Expansion valve technology
- Variable speed compressor technology
- Self-closing door with 120° stay-open feature
- · Stainless steel door liners
- · 22 Gauge stainless steel doors
- · LED interior light
- · Heavy-duty cylinder locks
- · Snap-in magnetic gaskets for positive door seal
- · Hinged front shroud
- · Reinforced stainless steel door ramps
- Internal cart guides
- Accepts carts up to 26 3/8" (W) x 26" (D) x 64 1/2" (H) (cart not included)
- · Wiper gasket at bottom of door seals door to ramp
- · Energy saving thermal breaker
- · Stainless steel breaker caps
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- · Stainless steel interior
- · Door swing orientation (at time of order)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil, located out of the food zone
- Freezer capable of maintaining product temperature down to -10°F








3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	PFT1HC-1AS
EXTERNAL DIMENSIONAL DATA	
Width Overall	36 ½"
Depth Overall with Handle	39 ¾"
Height Overall	84 ¾"
Number of Doors	2
Depth with Doors Open 90°	99"
Between Cart Guides	26 ¾"
Door Openings (in)	27 %" x 65 %"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	38.69
Internal Width Overall (in)	31 ¼"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	66 1⁄4"
ELECTRICAL DATA	
Full Load Amperes 115/60/1	10.5
REFRIGERATION DATA	
Horsepower	3/4+
Capacity (BTU/Hr)	2580
Heat Rejection (BTU/Hr)	3870
Charge (lbs/grams/ounces)	0.2866 / 130 / 4.6
SHIPPING DATA	
Gross Weight - Crated	500 lbs
Height - Crated	92"
Width - Crated	45"
Depth - Crated	45"

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

P Series Top Mount Roll-Thru Freezer

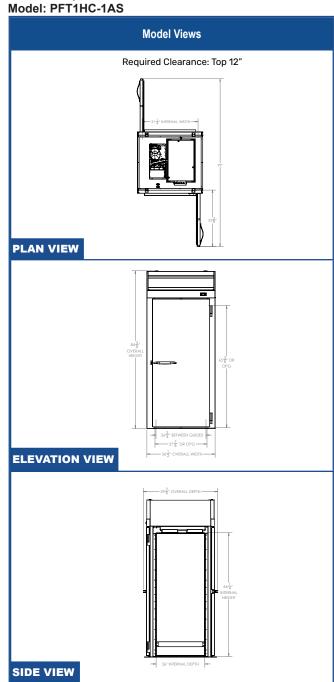



ELECTRICAL CONNECTION



115/60/1

Unit pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.

