



4184 E. Conant st., Long Beach, CA 90808  
 Tel. 800-500-3519 Fax. 310-900-1066  
[www.turboairinc.com](http://www.turboairinc.com)

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

## 60" Wide Heavy Duty Restaurant Ranges - Combination



TARG-4B36G



TARG-24G6B

### ≡ FEATURES & BENEFITS ≡

- Heavy gauge welded frame construction
- Stainless steel front, sides, back riser lift-off high shelf
- Individual pilot for each lift off top open burner at 32,000 btu/hr
- 6" stainless steel adjustable legs (casters available as an option)
- 12" x 12" sectioned heavy duty cast iron grates
- Full size pull out crumb tray
- Wrap around full stainless steel oven interior / 26.3" depth standard
- Fully adjustable oven thermostat providing temperatures from 250-550°F degrees
- Pull out stainless steel door for easy cleaning
- Thermostat controlled griddle
- 1 stainless steel oven rack per oven (additional racks optional)
- CSA certified for safety / sanitation for USA and Canada



Model	Oven	Weight (lbs.)	Width (inches)	Total BTUs	Configuration
TARG-2B48G / 48G2B	2	1095	60	215K	2 Bunner / 48" Griddle Combo (NAT)
TARG-4B36G / 36G4B	2	1025	60	257K	4 Bunner / 36" Griddle Combo (NAT)
TARG-6B24G / 24G6B	2	995	60	299K	6 Bunner / 24" Griddle Combo (NAT)
TARG-8B12G / 12G8B	2	980	60	348K	8 Burner / 12" Griddle Combo (NAT)
TARG-2B48G-LP / 48G2B-LP	2	1095	60	209K	2 Burner / 48" Griddle Combo (LPG)
TARG-4B36G-LP / 36G4B-LP	2	1025	60	251K	4 Burner / 36" Griddle Combo (LPG)
TARG-6B24G-LP / 24G6B-LP	2	995	60	293K	6 Burner / 24" Griddle Combo (LPG)
TARG-8B12G-LP / 12G8B-LP	2	980	60	342K	8 Burner / 12" Griddle Combo (LPG)

# 60" Wide Heavy Duty Restaurant Ranges - Combination


DATA	TARG-2B48G / 48G2B	TARG-4B36G / 36G4B	TARG-6B24G / 24G6B	TARG-8B12G / 12G8B
Gas Type	NAT	NAT	NAT	NAT
Gas Connection	3/4" x 2	3/4" x 2	3/4" x 2	3/4" x 2
Regulator	3/4"	3/4"	3/4"	3/4"
Gas Pressure	5 W.C"	5 W.C"	5 W.C"	5 W.C"
BTU	215,000	257,000	299,000	348,000
<b>DIMENSIONAL DATA</b>				
Ext. Length Overall (inch)	60 (1524mm)	60 (1524mm)	60 (1524mm)	60 (1524mm)
Ext. Depth Overall (inch)	31 7/8 (810mm) + manifold	31 7/8 (810mm) + manifold	31 7/8 (810mm) + manifold	31 7/8 (810mm) + manifold
Ext. Height Overall (inch)	56 1/2 (1436mm)	56 1/2 (1436mm)	56 1/2 (1436mm)	56 1/2 (1436mm)
<b>OVEN DIMENSION (Interior)</b>				
Number of Oven	2	2	2	2
Length (inch)	26 3/8 (670mm)	26 3/8 (670mm)	26 3/8 (670mm)	26 3/8 (670mm)
Depth (inch)	26 1/4 (669mm)	26 1/4 (669mm)	26 1/4 (669mm)	26 1/4 (669mm)
Height (inch)	13 5/8 (345mm)	13 5/8 (345mm)	13 5/8 (345mm)	13 5/8 (345mm)
Weight (lbs.)	1095	1025	995	980
<b>DATA</b>				
Gas Type	LPG	LPG	LPG	LPG
Gas Connection	3/4" x 2	3/4" x 2	3/4" x 2	3/4" x 2
Regulator	3/4"	3/4"	3/4"	3/4"
Gas Pressure	10 W.C"	10 W.C"	10 W.C"	10 W.C"
BTU	209,000	251,000	293,000	342,000
<b>DIMENSIONAL DATA</b>				
Ext. Length Overall (inch)	60 (1524mm)	60 (1524mm)	60 (1524mm)	60 (1524mm)
Ext. Depth Overall (inch)	31 7/8 (810mm) + manifold	31 7/8 (810mm) + manifold	31 7/8 (810mm) + manifold	31 7/8 (810mm) + manifold
Ext. Height Overall (inch)	56 1/2 (1436mm)	56 1/2 (1436mm)	56 1/2 (1436mm)	56 1/2 (1436mm)
<b>OVEN DIMENSION (Interior)</b>				
Number of Oven	2	2	2	2
Length (inch)	26 3/8 (670mm)	26 3/8 (670mm)	26 3/8 (670mm)	26 3/8 (670mm)
Depth (inch)	26 1/4 (669mm)	26 1/4 (669mm)	26 1/4 (669mm)	26 1/4 (669mm)
Height (inch)	13 5/8 (345mm)	13 5/8 (345mm)	13 5/8 (345mm)	13 5/8 (345mm)
Weight (lbs.)	1095	1025	995	980

Design and specifications subject to change without notice.  
Actual shipping weight may differ due to extra packing materials for product protection.


### OPTIONAL ACCESSORIES :

- Casters (Set of 4)
- Holder Set, Oven Kick Plate: RCP1126
- Stainless steel oven racks

### WARRANTY : 1 Year Labor and Parts Warranty

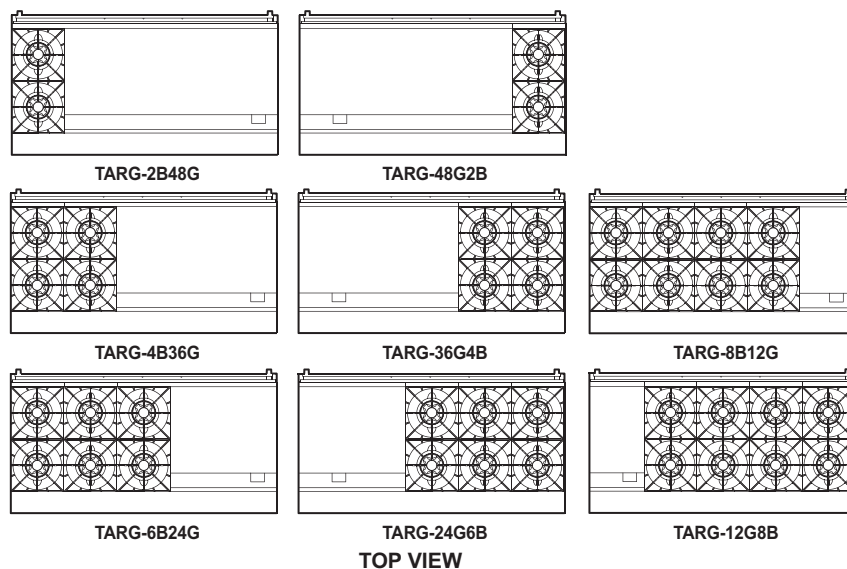

### PLAN VIEW

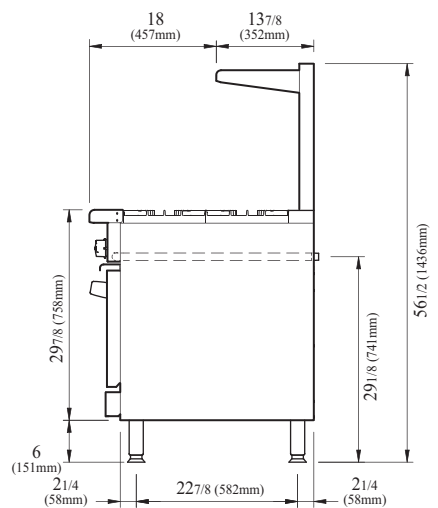

Ver.20201218



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

TURBO AIR REFRIGERATOR MANUFACTURER

GERMAN KNIFE

RADIANCE

TURBO AIR REFRIGERATION SYSTEM

TEXAKING