

# MP-14RG-HC



## Real Air Cooling

The multi-duct vortex refrigeration system and finned evaporator can prevent frosting completely and improve temperature uniformity to a large extent.

## Real Energy Saving


The refrigerator is equipped with "M + Energy Core" power management system and complete air cooling design, improving energy saving efficiency by more than 40%.

#### 🎹 Real Visibility

The electrical heating + LOW-E design with double considerations can achieve a better anti-condensation effect for the glass door.

### Real Safety

Seven temperature probes can ensure high precision of temperature control with nearly no fluctuation and thus can improve safety.

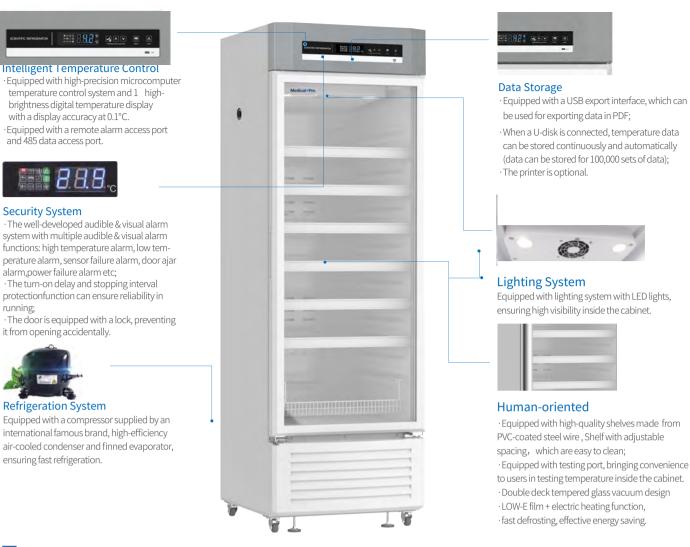

## Scope of Application

Suitable for storage of biological products, vaccines, drugs, reagents, etc. Suitable for use in pharmacies, pharmaceutical factories, hospitals, centers for disease prevention & control, clinics, etc.

## 

2~8°C Pharmacy Refrigerator	
Model	MP-14RG-HC
Cabinet Type	Upright
Capacity(L)	395
Internal Size(W*D*H)mm	580*533*1352
External Size(W*D*H)mm	650*673*1992
Package Size(W*D*H)mm	717*732*2065
NW/GW(Kgs)	95/108
Performance	
Temperature Range	2~8°C
Ambient Temperature	16-32°C
Cooling Performance	5°C
Climate Class	N
Controller	Microprocessor
Display	Digital display
Refrigeration	
Compressor	1pc
Cooling Method	Air cooling
Defrost Mode	Automatic
Refrigerant	R290
Insulation Thickness(mm)	R/L:35,B:52
Construction	
External Material	PCM
Inner Material	HIPS
Shelves	6+1(coated steel wired shelf)
Door Lock with Key	Yes
Padlock	Yes
Lighting	LED
Access Port	1pc. Ø 25 mm
Casters	4+ (2 leveling feet)
Data Logging/Interval/Recording Time	USB/Record every 10 minutes / 12 months
Door with Heater	Yes
Alarm	
Temperature	High/Low temperature, High ambient temperature, Condenser overheating
Electrical	Power failure , Low battery
System	Sensor error, Door ajar, Built-in USB datalogger Failure, Communication failure
Electrical	
Power Supply(V/HZ)	110/60
Rated Power(W)	360
Power Consumption (KWh/24h)	3.71
Rated Current(A)	3.77
Accessories	
Standard	RS485,Remote alarm contact,Backup battery

<sup>\*</sup>The model, parameters and performance specified in this brochure may be changed without prior notice because of product upgrading.

\*There may be differences between the product images shown in this brochure and the actual products. When you are buying any product, please check the actual product.

