

TC 12 DENVER PLUS TC 22 DAKOTA PLUS

Meat grinders



TC 12 Denver Plus



TC 12 Denver Plus

TC 12 DENVER PLUS

- Reliable medium-duty meat grinders
- Dependable gear drive
- Ideal for on-demand operations
- Up to 5 lbs. per minute output
- Easy and fast breakdown for cleaning
- Convenient compartment to store plate and knife

Features

Technical:

- Sealed gear box with hardened gears in oil bath.
- 5 different plates available (3/16", 7/32", 5/26", 3/8", 9/16").
- Stainless steel AISI 304 conveying screw and head (TC 22 DAKOTA).

Sanitary

- Easy and fast cleaning and sanitation.

TC 22 DAKOTA PLUS

- Designed for continuous service in high-volume and on-demand operations
- Completely stainless steel housing assembly
- Powerful 1.5 Hp motor
- Stainless steel knife and 3/16" plate included
- Fast breakdown for an easy cleaning
- ON/OFF rotary cam switch with reverse mode to prevent clogging

Specifications

Construction:

ABS shockproof sides, aluminum body, conveying screw and head.

Motor TC 12 Denver Plus: 1/2 Hp (370 W) 1 Hp peak, fan cooled.

Motor TC 22 Dakota Plus: 1.5 Hp (1,100 W), fan cooled.

Electrical: 120V AC, 60Hz, single-phase, 13 Amp.

Plug & Cord: Attached, flexible, 3 wire SJT 14 AWG, 6'4" long cord, NEMA 5-15P.

Controls: ON (I) / OFF (O) buttons. No volt release (TC 12 DENVER PLUS)

Controls: Rotary cam switch with reverse. (TC 22 DAKOTA PLUS)



Certified to UL Standard 763 and NSF Standard 08
 Certified to CSA Standard C22.2



TC 22 Dakota Plus



TC 22 Dakota Plus

OPTIONALS



Plate Ø 1/8"



Plate Ø 3/16"



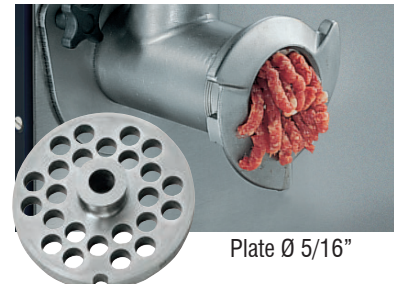


Plate Ø 5/16"



Compartment for knives and blades only for TC 12 Denver Plus



	Power	Power source	TC output/h	Standard plate	A	B	C	D	E	F	G	Net weight	Shipping	Gross weight
	watt/Hp		lbs./h.	Ø inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
TC 12 Denver Plus	370/0,50	120V AC, 60Hz single-phase 13 Amp	187	1/4"	11 ^{17/64} "	7 ^{43/64} "	15 ^{3/4} "	14 ^{11/16} "	4 ^{1/4} "	14 ^{11/16} "	17 ^{3/32} "	42	22 ^{1/16} " x 15 ^{3/4} " x 13 ^{3/4} "	49
TC 22 Dakota Plus	1100/1,5	120V AC 60Hz, single-phase, 13 Amp.	264	3/16"	13 ^{15/64} "	8 ^{17/64} "	18 ^{7/64} "	17 ^{23/32} "	5"	16 ^{31/16} "	18 ^{37/64} "	55	19 ^{11/16} " x 16 ^{15/16} " x 17 ^{11/16} "	59